

KYNAR® 400 HDC M800

Kynar® resins are fluorinated thermoplastic homopolymers.

Kynar® 400 HDC M800 resin is a thermoplastic fluorinated polymer. This product has been designed for Oil & Gas applications.

MAIN CHARACTERISTICS

PROPERTIES	VALUE	UNIT	TEST STANDARD
RHEOLOGICAL PROPERTIES			
Melt Volume-Flow Rate	3	cm ³ /10min	ISO 1133
Temperature	230	°C	-
Load	10	kg	-
Melt Viscosity, 230°C, 100 s-1	2	kPoise	ASTM D3835
MECHANICAL PROPERTIES			
Tensile Modulus	1000	MPa	ISO 527-1/-2
Yield stress	45	MPa	ISO 527-1/-2
Yield strain	15	%	ISO 527-1/-2
Nominal Strain at Break	40	%	ISO 527-1/-2
Charpy Impact Strength, +23°C	No Break	kJ/m ²	ISO 179/1eU
Charpy Impact Strength, -30°C	No Break	kJ/m ²	ISO 179/1eU
Charpy Notched Impact Strength, +23°C	51	kJ/m ²	ISO 179/1eA
Charpy Notched Impact Strength, -30°C	10.6	kJ/m ²	ISO 179/1eA
THERMAL PROPERTIES			
Melting Temperature, 10°C/min	171	°C	ISO 11357-1/-3
Temp. of Deflection Under Load, 1.80 MPa	67	°C	ISO 75-1/-2
Coeff. of Linear Thermal Expansion, parallel	183	E-6/K	ISO 11359-1/-2
OTHER PROPERTIES			
Density	1730	kg/m ³	ISO 1183
Spec. heat capacity of melt	1600	J/(kg K)	-
Thermal conductivity of melt	0.19	W/(m K)	-

Arkema France - A French "société anonyme", registered in the Nanterre (France) Trade and Companies Register under the number 319 632 790 SBC/11-2018


Please consult Arkema's disclaimer regarding the use of Arkema's products on <https://www.arkema.com/en/products/product-safety/disclaimer/index.html>

KYNAR®
BY ARKEMA


KYNAR® 400 HDC M800

DIAGRAMS

STRESS-STRAIN

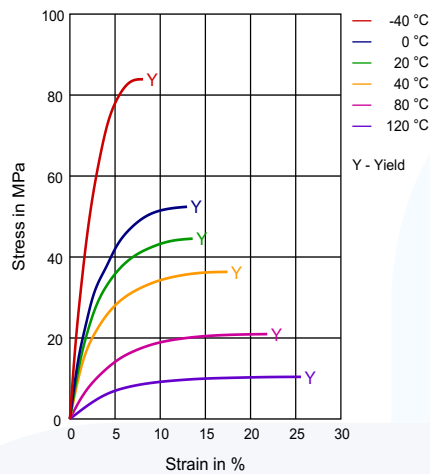

SECANT MODULUS-STRAIN

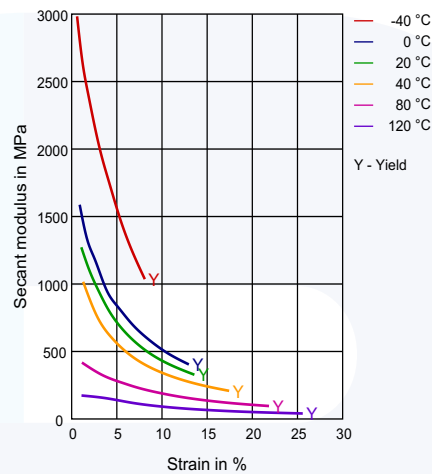

PROCESSING

Profile Extrusion, Sheet Extrusion, Other Extrusion

DELIVERY FORM

Pellets

ADDITIVES

Plasticizer

Please consult Arkema's disclaimer regarding the use of Arkema's products on <https://www.arkema.com/en/products/product-safety/disclaimer/index.html>

Kynar® is a registered trademark of Arkema
© 2022 Arkema Inc. All rights reserved.

kynar.com

Arkema Inc. – Technical Polymers
900 First Avenue
King of Prussia, PA 19406
Tel.: +1 610 205 7000
Fax: +1 610 205 7497
arkema-america.com

KYNAR®
BY ARKEMA

Headquarters: Arkema France
420, rue d'Estienne d'Orves
92705 Colombes Cedex – France
Tel.: +33 1 49 00 80 80
Fax: +33 1 49 00 83 96
arkema.com

Arkema France - A French "société anonyme" registered in the Nanterre (France) Trade and Companies Register under the number 319 632 790 S00711-2018