

KYNAR® 740

Kynar® resins are fluorinated thermoplastic homopolymers.

Outstanding characteristics: chemical resistance, imperviousness to UV, high barrier properties, high purity, good mechanical and thermo-mechanical properties.

Kynar® 740 resin is a standard grade of granules for extrusion of tubes and plaques, compression and transfer molding. This product is ANSI/NSF Standard 61 certified.

A powder form is available as **Kynar® 741 resin**.

MAIN CHARACTERISTICS

PROPERTIES	VALUE	UNIT	TEST STANDARD
RHEOLOGICAL PROPERTIES			
Melt Volume-Flow Rate	1.1	cm ³ /10min	ISO 1133
Temperature	230	°C	-
Load	5	kg	-
Melt Flow Rate	1.5 - 3	g/10min	ASTM D1238
Temperature	230	°C	-
Load	5	kg	-
Molding Shrinkage, parallel	2.0	%	ISO 294-4, 2577
Molding Shrinkage, normal	2.0	%	ISO 294-4, 2577
Melt Viscosity, 230°C, 100 s-1	16 - 22	kPoise	ASTM D3835
MECHANICAL PROPERTIES			
Tensile Modulus	1700	MPa	ISO 527-1/-2
Tensile Modulus, 73 °F	1380 - 2310	MPa	ASTM D638
Yield stress	50	MPa	ISO 527-1/-2
Tensile Strength at Yield, 73 °F	44.8 - 55.2	MPa	ASTM D638
Yield strain	7	%	ISO 527-1/-2
Elongation at Yield, 73 °F	5 - 10	%	ASTM D638
Nominal Strain at Break	> 50	%	ISO 527-1/-2
Tensile Strength at Break, 73 °F	34.5 - 55.2	MPa	ASTM D638
Elongation at Break, 73 °F	20 - 100	%	ASTM D638
Taber Abrasion, CS 17 1000g:pad	5 - 9	mg/1000 cycles	ASTM-G195-13A
Hardness, Shore D, 73 °F	76 - 80	-	ASTM D2240
Flexural Modulus, 73 °F	1380 - 2310	MPa	ASTM D790
Flexural Strength @ 5% Strain, 73 °F	58.6 - 75.8	MPa	ASTM D790
Compressive Strength, 73 °F	68.9 - 103	MPa	ASTM D695
Tensile Creep Modulus, 1h	1050	MPa	ISO 899-1
Tensile Creep Modulus, 1000h	570	MPa	ISO 899-1
Charpy Impact Strength, +23°C	244	kJ/m ²	ISO 179/1eU
Charpy Impact Strength, -30°C	186	kJ/m ²	ISO 179/1eU

Arkema France - A French "société anonyme", registered in the Nanterre (France) Trade and Companies Register under the number 319 632 790 SBC/11-2018

Please consult Arkema's disclaimer regarding the use of Arkema's products on <https://www.arkema.com/en/products/product-safety/disclaimer/index.html>

KYNAR®
BY ARKEMA

KYNAR® 740

Charpy Notched Impact Strength, +23°C	14	kJ/m ²	ISO 179/1eA
Charpy Notched Impact Strength, -30°C	5	kJ/m ²	ISO 179/1eA
Unnotched Impact Strength, 73 °F	1.07 - 4.27	kJ/m	ASTM D256
Notched Impact Strength, 73 °F	0.0961 - 0.214	kJ/m	ASTM D256
Coefficient of Friction, Static vs. Steel, 73 °F	0.2	-	ASTM D1894
Coefficient of Friction, Dynamic vs. Steel, 73 °F	0.14	-	ASTM D1894
THERMAL PROPERTIES			
Melting Temperature, 10°C/min	168	°C	ISO 11357-1/-3
Melting Point, 73 °F	165 - 172	°C	ASTM D3418
Glass Transition Temperature, 10°C/min	-40	°C	ISO 11357-1/-2
Glass Transition Temperature (T _g)	-40.6 - -38.3	°C	ASTM D7028
Temperature Rating	150	°C	UL RTI
Temp. of Deflection Under Load, 1.80 MPa	105	°C	ISO 75-1/-2
Heat Deflection Temperature, 264 Psi, 248 °F/hr	105 - 115	°C	ASTM D648
Temp. of Deflection Under Load, 0.45 MPa	135	°C	ISO 75-1/-2
Heat Deflection Temperature, 66 Psi, 248 °F/hr	125 - 140	°C	ASTM D648
Vicat Softening Temperature, 50°C/h 50N	135	°C	ISO 306
Coeff. of Linear Thermal Expansion, parallel	150	E-6/K	ISO 11359-1/-2
Coefficient of Thermal Expansion, 73 °F	11.9 - 14.4	10E-5/°C	ASTM D696
Burning Behav. at 1.5 mm Nominal Thickness	V-0	class	IEC 60695-11-10
Thickness Tested	1.6	mm	-
Yellow Card available	yes	-	-
Burning Behav. at Thickness h	V-0	class	IEC 60695-11-10
Thickness Tested	0.8	mm	-
Oxygen Index	43	%	ISO 4589-1/-2
Limiting Oxygen Index, 73 °F	44	%	ASTM D2863
Thermal Conductivity	0.17 - 0.19	W/(m K)	ASTM D433
Specific Heat	745 - 958	J/(kg K)	DSC
Thermal Decomposition TGA, in air	375	°C	1% wt. loss
Thermal Decomposition TGA, in nitrogen	410	°C	1% wt. loss
Relative Thermal Index, Mechanical	150	°C	UL 746B
Relative Thermal Index, Electrical	150	°C	UL 746B
ELECTRICAL PROPERTIES			
Relative Permittivity, 100Hz	11	-	IEC 60250
Relative Permittivity, 1MHz	8	-	IEC 60250
Dielectric Constant, 1 kHz	4.5 - 9.5	-	ASTM D150
Dissipation Factor, 100Hz	260	E-4	IEC 60250

Arkema France - A French "société anonyme", registered in the Nanterre (France) Trade and Companies Register under the number 319 632 790 SJC/11-2018

Please consult Arkema's disclaimer regarding the use of Arkema's products on <https://www.arkema.com/en/products/product-safety/disclaimer/index.html>

KYNAR®
BY ARKEMA

KYNAR® 740

Dissipation Factor, 1MHz	2310	E-4	IEC 60250
Dissipation Factor, 100 kHz	0.01 - 0.21	-	ASTM D150
Volume Resistivity	2E12	Ohm*m	IEC 60093
Volume Resistivity, DC 68 °F, 65% R.H.	2E14	Ohm*cm	ASTM D257
Surface Resistivity	> 1E15	Ohm	IEC 60093
Dielectric (Electric) Strength	21	kV/mm	IEC 60243-1
Dielectric (Electric) Strength, 73°F	1.7	kV/mil	ASTM D149
Comparative Tracking Index	600	-	IEC 60112
OTHER PROPERTIES			
Water Absorption	0.03	%	Sim. to ISO 62
Water Absorption	0.01 - 0.03	%	ASTM D570
Humidity Absorption	0.015	%	Sim. to ISO 62
Density	1780	kg/m ³	ISO 1183
Specific Gravity, 73 °F	1.77 - 1.79	-	ASTM D792
OPTICAL PROPERTIES			
Refractive Index @ sodium D line	1.42	-	ASTM D542

MAIN APPLICATIONS:

- corrosion protection in the chemical industry
- wire and cable
- coating (painting, co-extrusion)
- off-shore


Please consult Arkema's disclaimer regarding the use of Arkema's products on <https://www.arkema.com/en/products/product-safety/disclaimer/index.html>

KYNAR®
BY ARKEMA


KYNAR® 740

DIAGRAMS


VISCOSITY-SHEAR RATE

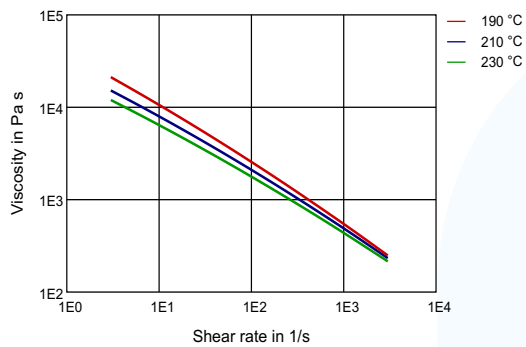


SHEARSTRESS-SHEAR RATE

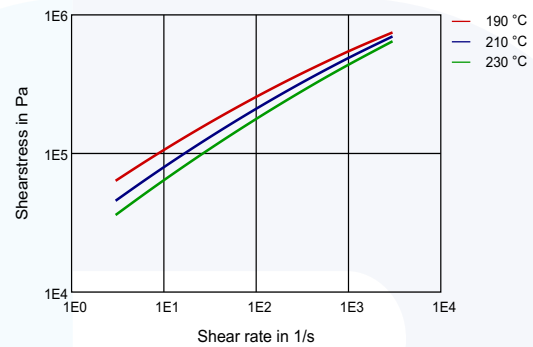

STRESS-STRAIN

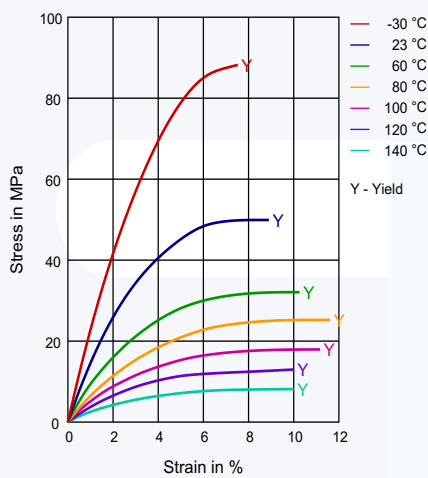

SECANT MODULUS-STRAIN

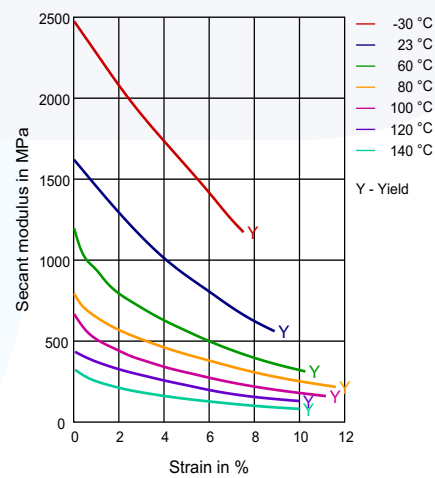


Arkema France - A French "société anonyme", registered in the Nanterre (France) Trade and Companies Register under the number 319 632 790
SDC/11-2018

Please consult Arkema's disclaimer regarding the use of Arkema's products on <https://www.arkema.com/en/products/product-safety/disclaimer/index.html>

KYNAR®
BY ARKEMA

KYNAR® 740

SPECIFIC VOLUME-TEMPERATURE (PVT)

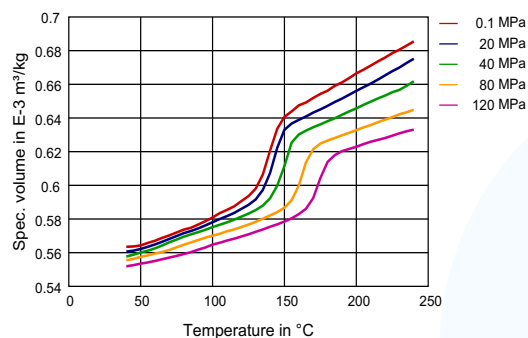

PROCESSING

Profile Extrusion, Sheet Extrusion, Other Extrusion, Transfer Molding, Thermoforming

DELIVERY FORM

Pellets

SPECIAL CHARACTERISTICS

Heat Stabilized, Light Stabilized

REGIONAL AVAILABILITY

North America, Europe, Asia Pacific, South and Central America, Near East/Africa

Arkema France - A French "société anonyme" registered in the Nanterre (France) Trade and Companies Register under the number 319 632 790 S00711-2018

Please consult Arkema's disclaimer regarding the use of Arkema's products on <https://www.arkema.com/en/products/product-safety/disclaimer/index.html>

Kynar® is a registered trademark of Arkema
© 2022 Arkema Inc. All rights reserved.

kynar.com

KYNAR®
BY **ARKEMA**

Arkema Inc. – Technical Polymers
900 First Avenue
King of Prussia, PA 19406
Tel.: +1 610 205 7000
Fax: +1 610 205 7497
arkema-america.com

Headquarters: Arkema France
420, rue d'Estienne d'Orves
92705 Colombes Cedex – France
Tel.: +33 1 49 00 80 80
Fax: +33 1 49 00 83 96
arkema.com