

KYNAR FLEX® 2800-00

Kynar Flex® resins are fluorinated thermoplastic copolymers.

Outstanding characteristics: chemical resistance, imperviousness to UV, high barrier properties, high purity, good mechanical and thermo-mechanical properties.

Kynar Flex® 2800-00 resin is a standard grade of granules, compared to the homopolymer grades, which exhibits a lower modulus, a better resistance to stress cracking in alkaline and oxidizing media, and a lower melting point.

For cable coating, extrusion of tube and plaque, compression molding of bulky parts.

Additional characteristics:

- Easily processed using conventional equipment
- Excellent thermal stability
- Retains properties after aging
- Pigmentable
- UL RTI temperature rating 125°C
- Radiation crosslinking

[UL Yellow Card](#)

MAIN CHARACTERISTICS

PROPERTIES	VALUE	UNIT	TEST STANDARD
RHEOLOGICAL PROPERTIES			
Melt Volume-Flow Rate	0.5	cm ³ /10min	ISO 1133
Temperature	230	°C	-
Load	5	kg	-
Melt Flow Rate	3 - 8	g/10min	ASTM D1238
Temperature	230	°C	-
Load	12.5	kg	-
Melt Viscosity, 230°C, 100 s-1	22 - 27	kPoise	ASTM D3835
MECHANICAL PROPERTIES			
Tensile Modulus	700	MPa	ISO 527-1/-2
Tensile Modulus, 73 °F	552 - 896	MPa	ASTM D638
Yield stress	27	MPa	ISO 527-1/-2
Tensile Strength at Yield, 73 °F	20 - 34.5	MPa	ASTM D638
Yield strain	15	%	ISO 527-1/-2
Elongation at Yield, 73 °F	10 - 20	%	ASTM D638
Nominal Strain at Break	> 50	%	ISO 527-1/-2
Tensile Strength at Break, 73 °F	17.2 - 34.5	MPa	ASTM D638
Elongation at Break, 73 °F	100 - 300	%	ASTM D638
Taber Abrasion, CS 17 1000g:pad	16 - 19	mg/1000 cycles	ASTM-G195-13A
Hardness, Shore D, 73 °F	60 - 70	-	ASTM D2240

Arkema France - A French "société anonyme", registered in the Nanterre (France) Trade and Companies Register under the number 319 632 790 SBC/11-2018

Please consult Arkema's disclaimer regarding the use of Arkema's products on <https://www.arkema.com/en/products/product-safety/disclaimer/index.html>

KYNARFLEX®
BY **ARKEMA**

KYNAR FLEX® 2800-00

Flexural Modulus, 73 °F	483 - 758	MPa	ASTM D790
Flexural Strength @ 5% Strain, 73 °F	20.7 - 34.5	MPa	ASTM D790
Compressive Strength, 73 °F	31 - 41.4	MPa	ASTM D695
Charpy Notched Impact Strength, +23°C	No Break	kJ/m ²	ISO 179/1eA
Charpy Notched Impact Strength, -30°C	5	kJ/m ²	ISO 179/1eA
Unnotched Impact Strength, 73 °F	No Break	kJ/m	ASTM D256
Notched Impact Strength, 73 °F	0.534 - 1.07	kJ/m	ASTM D256
Coefficient of Friction, Static vs. Steel, 73 °F	0.33	-	ASTM D1894
Coefficient of Friction, Dynamic vs. Steel, 73 °F	0.33	-	ASTM D1894
THERMAL PROPERTIES			
Melting Temperature, 10°C/min	143	°C	ISO 11357-1/-3
Melting Point, 73 °F	140 - 145	°C	ASTM D3418
Glass Transition Temperature, 10°C/min	-40	°C	ISO 11357-1/-2
Glass Transition Temperature (T_g)	-41.1 - -39.4	°C	ASTM D7028
Temperature Rating	130	°C	UL RTI
Temp. of Deflection Under Load, 1.80 MPa	48	°C	ISO 75-1/-2
Heat Deflection Temperature, 264 Psi, 248 °F/hr	40 - 55	°C	ASTM D648
Temp. of Deflection Under Load, 0.45 MPa	68	°C	ISO 75-1/-2
Heat Deflection Temperature, 66 Psi, 248 °F/hr	60 - 75	°C	ASTM D648
Vicat Softening Temperature, 50°C/h 50N	79	°C	ISO 306
Coeff. of Linear Thermal Expansion, parallel	160	E-6/K	ISO 11359-1/-2
Coefficient of Thermal Expansion, 73 °F	12.6 - 18.5	10E-5/°C	ASTM D696
Burning Behav. at 1.5 mm Nominal Thickness	V-0	class	IEC 60695-11-10
Thickness Tested	1.5	mm	-
Yellow Card available	yes	-	-
Burning Behav. at Thickness h	V-0	class	IEC 60695-11-10
Thickness Tested	0.8	mm	-
Oxygen Index	43	%	ISO 4589-1/-2
Limiting Oxygen Index, 73 °F	42	%	ASTM D2863
Thermal Conductivity	0.144 - 0.18	W/(m K)	ASTM D433
Specific Heat	745 - 958	J/(kg K)	DSC
Thermal Decomposition TGA, in air	375	°C	1% wt. loss
Thermal Decomposition TGA, in nitrogen	410	°C	1% wt. loss
Relative Thermal Index, Mechanical	130	°C	UL 746B
Relative Thermal Index, Electrical	130	°C	UL 746B
ELECTRICAL PROPERTIES			
Relative Permittivity, 100Hz	11	-	IEC 60250

Arkema Franco - A French "société anonyme", registered in the Nanterre (France) Trade and Companies Register under the number 319 632 790 SBC/11-2018

Please consult Arkema's disclaimer regarding the use of Arkema's products on <https://www.arkema.com/en/products/product-safety/disclaimer/index.html>

KYNAR FLEX®
BY **ARKEMA**

KYNAR FLEX® 2800-00

Relative Permittivity, 1MHz	7	-	IEC 60250
Dielectric Constant, 1 kHz	3.5 - 10.6	-	ASTM D150
Dissipation Factor, 100Hz	520	E-4	IEC 60250
Dissipation Factor, 1MHz	2330	E-4	IEC 60250
Dissipation Factor, 100 kHz	0.02 - 0.21	-	ASTM D150
Volume Resistivity	2E12	Ohm*m	IEC 60093
Volume Resistivity, DC 68 °F, 65% R.H.	2E14	Ohm*cm	ASTM D257
Surface Resistivity, 73 °F	5.1E11 - 5.3E11	Ohm per square	ASTM D257
Dielectric (Electric) Strength, 73°F	1.3 - 1.5	kV/mil	ASTM D149
OTHER PROPERTIES			
Water Absorption	0.03	%	Sim. to ISO 62
Water Absorption	0.03 - 0.05	%	ASTM D570
Humidity Absorption	0.015	%	Sim. to ISO 62
Density	1780	kg/m³	ISO 1183
Specific Gravity, 73 °F	1.77 - 1.8	-	ASTM D792
OPTICAL PROPERTIES			
Refractive Index @ sodium D line	1.41	-	ASTM D542

MAIN APPLICATIONS:

- flexible tubing
- off shore
- corrosion protection in the chemical industry
- wire and cable jacketing with and without cross-linking
- coating (painting, co-extrusion)

Arkema France - A French "société anonyme", registered in the Nanterre (France) Trade and Companies Register under the number 319 632 790 SBC/11-2018


Please consult Arkema's disclaimer regarding the use of Arkema's products on <https://www.arkema.com/en/products/product-safety/disclaimer/index.html>

KYNARFLEX®
BY **ARKEMA**


KYNAR FLEX® 2800-00

DIAGRAMS


VISCOSITY-SHEAR RATE

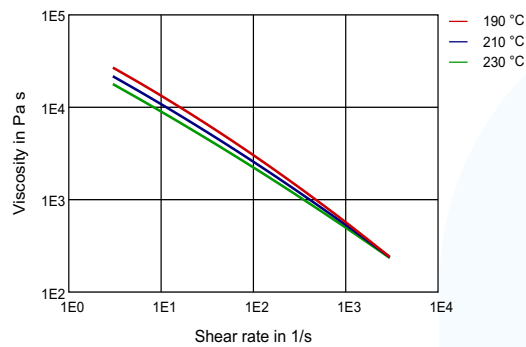


SHEARSTRESS-SHEAR RATE

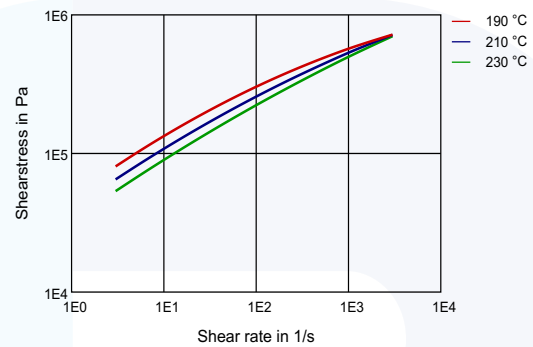

DYNAMIC SHEAR MODULUS-TEMPERATURE

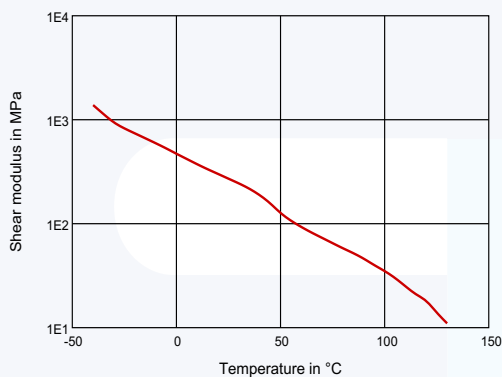

STRESS-STRAIN

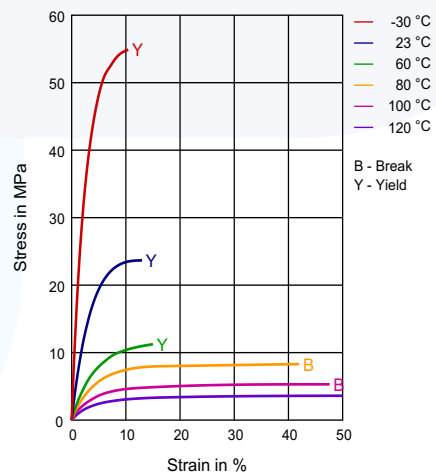


Arkema France - A French "société anonyme", registered in the Nanterre (France) Trade and Companies Register under the number 319 632 790
SDC/11-2018

Please consult Arkema's disclaimer regarding the use of Arkema's products on <https://www.arkema.com/en/products/product-safety/disclaimer/index.html>

KYNARFLEX®
BY **ARKEMA**

KYNAR FLEX® 2800-00

SECANT MODULUS-STRAIN

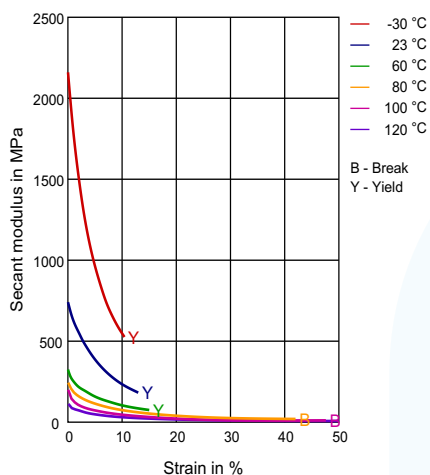

PROCESSING

Profile Extrusion, Other Extrusion

DELIVERY FORM

Pellets

SPECIAL CHARACTERISTICS

Heat Stabilized, Light Stabilized

REGIONAL AVAILABILITY

North America, Europe, Asia Pacific, South and Central America, Near East/Africa

Arkema France - A French "société anonyme" registered in the Nanterre (France) Trade and Companies Register under the number 319 632 790 S00711-2018

Please consult Arkema's disclaimer regarding the use of Arkema's products on <https://www.arkema.com/en/products/product-safety/disclaimer/index.html>

Kynar Flex® is a registered trademark of Arkema
 © 2022 Arkema Inc. All rights reserved.

kynar.com

KYNAR FLEX®
 BY **ARKEMA**

Arkema Inc. – Technical Polymers
 900 First Avenue
 King of Prussia, PA 19406
 Tel.: +1 610 205 7000
 Fax: +1 610 205 7497
arkema-america.com

Headquarters: Arkema France
 420, rue d'Estienne d'Orves
 92705 Colombes Cedex – France
 Tel.: +33 1 49 00 80 80
 Fax: +33 1 49 00 83 96
arkema.com