

PEBAX® 4533 SP 01

Polyether block amide **Pebax® 4533 SP 01 resin** is a thermoplastic elastomer made of flexible polyether and rigid polyamide. This SP grade has been developed to be heat and UV resistant.

MAIN CHARACTERISTICS

PROPERTIES	DRY / COND	UNIT	TEST STANDARD
RHEOLOGICAL PROPERTIES			
Molding Shrinkage, parallel	0.4 / *	%	ISO 294-4, 2577
Molding Shrinkage, normal	1.1 / *	%	ISO 294-4, 2577
MECHANICAL PROPERTIES			
Tensile Modulus	88 / 81	MPa	ISO 527-1/-2
Stress at 50% Strain	9 / 9	MPa	ISO 527-1/-2
Strain at Break	> 50 / > 50	%	ISO 527-1/-2
Stress at 10% Elongation	6 / *	MPa	ISO 527-1/-2
Stress at 100% Elongation	9 / *	MPa	ISO 527-1/-2
Strain at Break TPE	> 300 / *	%	ISO 527-1/-2
Stress at Break TPE	42 / *	MPa	ISO 527-1/-2
Compression Set at 23 °C, 24h	37 / *	%	ISO 815
Tear Strength	77 / *	kN/m	ISO 34-1
Abrasion Resistance	40 / *	mm ³	ISO 4649
Shore A Hardness, 3s	92 / *	-	ISO 7619-1
Shore D Hardness, 15s	41 / *	-	ISO 7619-1
Charpy Impact Strength, +23°C	- / No Break	kJ/m ²	ISO 179/1eU
Charpy Impact Strength, -30°C	- / No Break	kJ/m ²	ISO 179/1eU
Charpy Notched Impact Strength, +23°C	- / No Break	kJ/m ²	ISO 179/1eA
Charpy Notched Impact Strength, -30°C	- / No Break	kJ/m ²	ISO 179/1eA
THERMAL PROPERTIES			
Melting Temperature, 10°C/min	147 / *	°C	ISO 11357-1/-3
Temp. of Deflection Under Load, 0.45 MPa	52 / *	°C	ISO 75-1/-2
Vicat Softening Temperature, 50°C/h 50N	111 / *	°C	ISO 306
Coeff. of Linear Thermal Expansion, parallel	200 / *	E-6/K	ISO 11359-1/-2
ELECTRICAL PROPERTIES			
Relative Permittivity, 100Hz	9 / -	-	IEC 60250
Relative Permittivity, 1MHz	6 / -	-	IEC 60250
Dissipation Factor, 100Hz	2090 / -	E-4	IEC 60250
Dissipation Factor, 1MHz	1120 / -	E-4	IEC 60250
Volume Resistivity	1.6E11 / -	Ohm*m	IEC 60093

Arkema France - A French "société anonyme", registered in the Nanterre (France) Trade and Companies Register under the number 319 632 790 S0C/11-2018

Please consult Arkema's disclaimer regarding the use of Arkema's products on <https://www.arkema.com/en/products/product-safety/disclaimer/index.html>

PEBAX®
BY **ARKEMA**

PEBAX® 4533 SP 01

Surface Resistivity	* / 3E12	Ohm	IEC 60093
Dielectric (Electric) Strength	43 / -	kV/mm	IEC 60243-1
Comparative Tracking Index	* / 600	-	IEC 60112
OTHER PROPERTIES			
Water Absorption	1.2 / *	%	Sim. to ISO 62
Humidity Absorption	0.4 / *	%	Sim. to ISO 62
Density	1010 / 1010	kg/m ³	ISO 1183
Spec. heat capacity of melt	2500	J/(kg K)	-
Thermal conductivity of melt	0.18	W/(m K)	-
Density of melt	830	kg/m ³	-

MAIN APPLICATIONS:

- Flexible injected parts
- High performance power transmission belts
- Silent gears

PACKAGING:

This grade is delivered dried in sealed packaging (25 kg bags) ready to be processed.


SHELF LIFE:

Two years from the delivery. For any use above this limit, please refer to our technical services.


PEBAX® 4533 SP 01

DIAGRAMS


VISCOSITY-SHEAR RATE

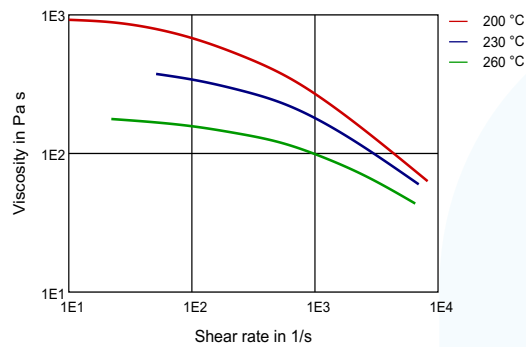


SHEARSTRESS-SHEAR RATE

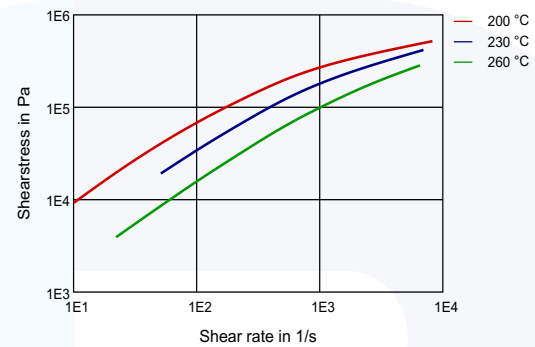

STRESS-STRAIN

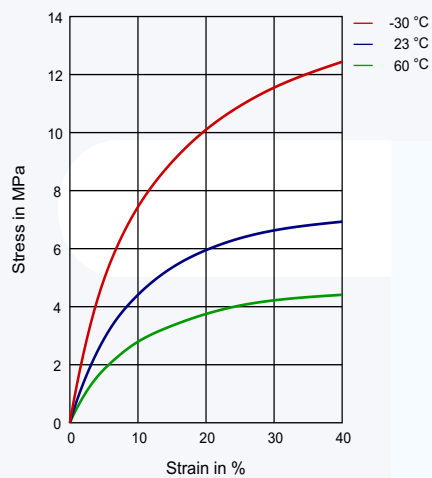

SECANT MODULUS-STRAIN

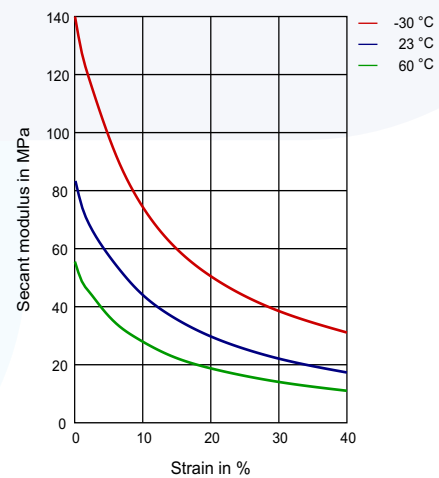


Please consult Arkema's disclaimer regarding the use of Arkema's products on <https://www.arkema.com/en/products/product-safety/disclaimer/index.html>

PEBAX®
BY ARKEMA

Arkema France - A French "société anonyme", registered in the Nanterre (France) Trade and Companies Register under the number 319 632 790 SBC/11-2018

PEBAX® 4533 SP 01

SPECIFIC VOLUME-TEMPERATURE (PVT)

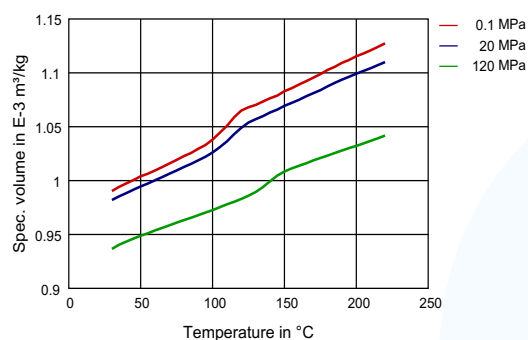

Processing conditions:

- Typical melt temperature (Min / Recommended / Max) : 200°C / 240°C / 270°C.
- Typical mold temperature : 10 – 30°C.
- Drying time and temperature (only necessary for bags opened for more than two hours) : 4-6 hours at 60-70°C.

Processing conditions:

- Typical melt temperature (Min / Recommended / Max) : 210°C / 220°C / 230°C.
- Drying time and temperature (only necessary for bags opened for more than two hours) : 4-6 hours at 60-70°C.

PROCESSING

Injection Molding, Film Extrusion, Profile Extrusion, Other Extrusion, Transfer Molding, Casting, Thermoforming

DELIVERY FORM

Pellets

SPECIAL CHARACTERISTICS

Heat Stabilized, Light Stabilized

REGIONAL AVAILABILITY

North America, Europe, Asia Pacific, South and Central America, Near East/Africa

Please consult Arkema's disclaimer regarding the use of Arkema's products on <https://www.arkema.com/en/products/product-safety/disclaimer/index.html>

Pebax® is a registered trademark of Arkema
© 2022 Arkema Inc. All rights reserved.

pebax.com

Arkema Inc. – Technical Polymers

900 First Avenue
King of Prussia, PA 19406
Tel.: +1 610 205 7000
Fax: +1 610 205 7497
arkema-america.com

PEBAX®
BY ARKEMA

Headquarters: Arkema France

420, rue d'Estienne d'Orves
92705 Colombes Cedex – France
Tel.: +33 1 49 00 80 80
Fax: +33 1 49 00 83 96
arkema.com