

RILSAMID® AESNO P201 TL

Rilsamid® AESNO P201 TL resin is a natural polyamide 12. This grade is plasticized and designed for tube extrusion.

Rilsamid® AESNO P201 TL resin falls into the PA12-PHLY category according to DIN 73378.

MAIN CHARACTERISTICS

PROPERTIES	DRY / COND	UNIT	TEST STANDARD
RHEOLOGICAL PROPERTIES			
Melt Volume-Flow Rate	5 / *	cm ³ /10min	ISO 1133
Temperature	235 / *	°C	-
Load	5 / *	kg	-
MECHANICAL PROPERTIES			
Tensile Modulus	- / 540	MPa	ISO 527-1/-2
Yield stress	- / 27	MPa	ISO 527-1/-2
Yield strain	- / 28	%	ISO 527-1/-2
Nominal Strain at Break	- / > 50	%	ISO 527-1/-2
Shore D Hardness, 15s	62 / *	-	ISO 7619-1
Charpy Impact Strength, +23°C	- / No Break	kJ/m ²	ISO 179/1eU
Charpy Impact Strength, -30°C	- / No Break	kJ/m ²	ISO 179/1eU
Charpy Notched Impact Strength, +23°C	- / No Break	kJ/m ²	ISO 179/1eA
Charpy Notched Impact Strength, -30°C	- / 3.8	kJ/m ²	ISO 179/1eA
THERMAL PROPERTIES			
Melting Temperature, 10°C/min	176 / *	°C	ISO 11357-1/-3
OTHER PROPERTIES			
Density	1010 / -	kg/m ³	ISO 1183

Arkema France - A French "société anonyme", registered in the Nanterre (France) Trade and Companies Register under the number 319 632 790
SDC/11-2018


Please consult Arkema's disclaimer regarding the use of Arkema's products on <https://www.arkema.com/en/products/product-safety/disclaimer/index.html>

RILSAMID®
BY **ARKEMA**


RILSAMID® AESNO P201 TL

DIAGRAMS

STRESS-STRAIN

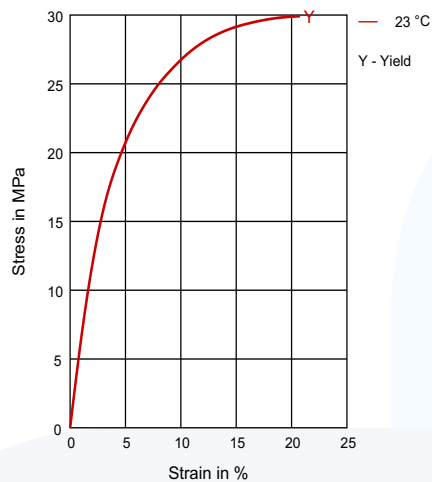

SECANT MODULUS-STRAIN

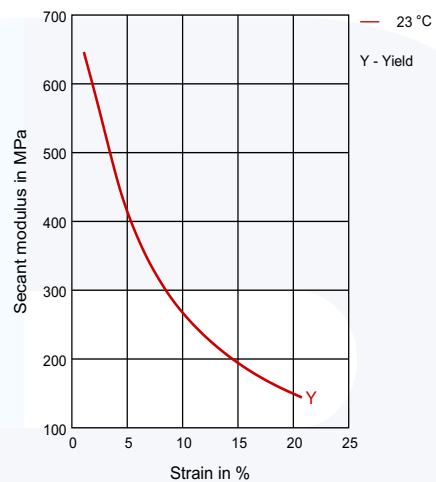

PROCESSING

Profile Extrusion, Other Extrusion

DELIVERY FORM

Pellets

ADDITIVES

Plasticizer

SPECIAL CHARACTERISTICS

Heat Stabilized, Light Stabilized

REGIONAL AVAILABILITY

North America, Europe, Asia Pacific, South and Central America, Near East/Africa

Arkema France - A French "société anonyme" registered in the Nanterre (France) Trade and Companies Register under the number 319 632 790 S00711-2018

Please consult Arkema's disclaimer regarding the use of Arkema's products on <https://www.arkema.com/en/products/product-safety/disclaimer/index.html>

Rilsamid® is a registered trademark of Arkema
© 2022 Arkema Inc. All rights reserved.

rilsamid.com

RILSAMID®
BY **ARKEMA**

Arkema Inc. – Technical Polymers
900 First Avenue
King of Prussia, PA 19406
Tel.: +1 610 205 7000
Fax: +1 610 205 7497
arkema-america.com

Headquarters: Arkema France
420, rue d'Estienne d'Orves
92705 Colombes Cedex – France
Tel.: +33 1 49 00 80 80
Fax: +33 1 49 00 83 96
arkema.com