

RILSAN® BESNO P20 TL

PA11-P, EHL, 22-005

Rilsan® BESNO P20 TL resin is a polyamide 11 produced from a renewable source. This natural grade is plasticized and designed for extrusion.

The percentage of renewable carbon according to ASTM D 6866 (calculated) is **>93%**.

MAIN CHARACTERISTICS

PROPERTIES	DRY / COND	UNIT	TEST STANDARD
RHEOLOGICAL PROPERTIES			
Melt Volume-Flow Rate	2 / *	cm³/10min	ISO 1133
Temperature	235 / *	°C	-
Load	5 / *	kg	-
MECHANICAL PROPERTIES			
Tensile Modulus	- / 510	MPa	ISO 527-1/-2
Yield stress	- / 31	MPa	ISO 527-1/-2
Yield strain	- / 40	%	ISO 527-1/-2
Nominal Strain at Break	- / > 50	%	ISO 527-1/-2
Shore D Hardness, 15s	64 / *	-	ISO 7619-1
Charpy Impact Strength, +23°C	- / No Break	kJ/m²	ISO 179/1eU
Charpy Impact Strength, -30°C	- / No Break	kJ/m²	ISO 179/1eU
Charpy Notched Impact Strength, +23°C	- / No Break	kJ/m²	ISO 179/1eA
Charpy Notched Impact Strength, -30°C	- / 11	kJ/m²	ISO 179/1eA
THERMAL PROPERTIES			
Melting Temperature, 10°C/min	182 / *	°C	ISO 11357-1/-3
Temp. of Deflection Under Load, 1.80 MPa	47 / *	°C	ISO 75-1/-2
Temp. of Deflection Under Load, 0.45 MPa	135 / *	°C	ISO 75-1/-2
Vicat Softening Temperature, 50°C/h 50N	146 / *	°C	ISO 306
Coeff. of Linear Thermal Expansion, parallel	100 / *	E-6/K	ISO 11359-1/-2
ELECTRICAL PROPERTIES			
Volume Resistivity	- / 1E10	Ohm*m	IEC 60093
Surface Resistivity	* / 2E12	Ohm	IEC 60093
Dielectric (Electric) Strength	- / 24	kV/mm	IEC 60243-1
OTHER PROPERTIES			
Water Absorption	1.8 / *	%	Sim. to ISO 62
Density	1040 / 1040	kg/m³	ISO 1183
%Bio-Based	93	-	ASTM D6866

Arkema France - A French "société anonyme", registered in the Nanterre (France) Trade and Companies Register under the number 319 632 790 SIRET 319 632 790

Please consult Arkema's disclaimer regarding the use of Arkema's products on <https://www.arkema.com/en/products/product-safety/disclaimer/index.html>

RILSAN®
BY ARKEMA

RILSAN® BESNO P20 TL

MAIN APPLICATIONS:

- Fluid transportation
- Air brake line
- Fuel line
- Tubing for use in motor vehicle

PACKAGING:


This grade is delivered dried in sealed packaging (25 kg bags, 1000 lb rigid containers) ready to be processed.

SHELF LIFE:


Two years from the delivery. For any use above this limit, please refer to our technical services.

DIAGRAMS

VISCOSITY-SHEAR RATE

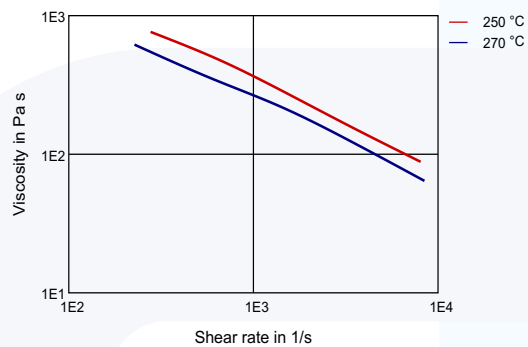

SHEARSTRESS-SHEAR RATE

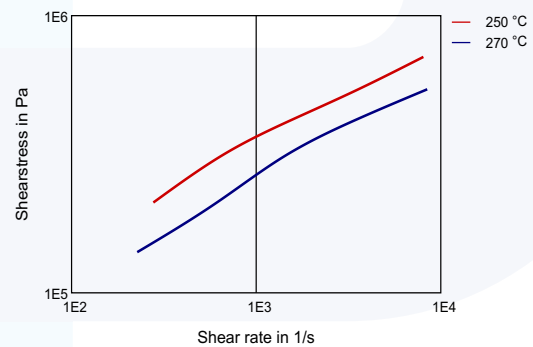


Arkema France - A French "société anonyme", registered in the Nanterre (France) Trade and Companies Register under the number 319 632 790 SBC/11-2018

Please consult Arkema's disclaimer regarding the use of Arkema's products on <https://www.arkema.com/en/products/product-safety/disclaimer/index.html>


RILSAN®
BY **ARKEMA**

RILSAN® BESNO P20 TL


DYNAMIC SHEAR MODULUS-TEMPERATURE

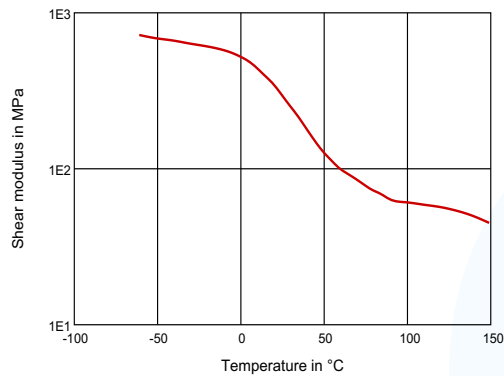


STRESS-STRAIN

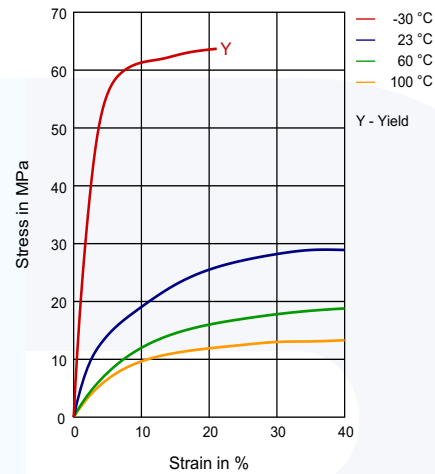

SECANT MODULUS-STRAIN

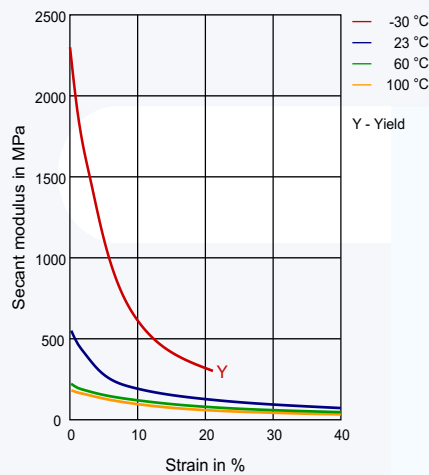

STRESS-STRAIN (ISOCHRONOUS) 40°C

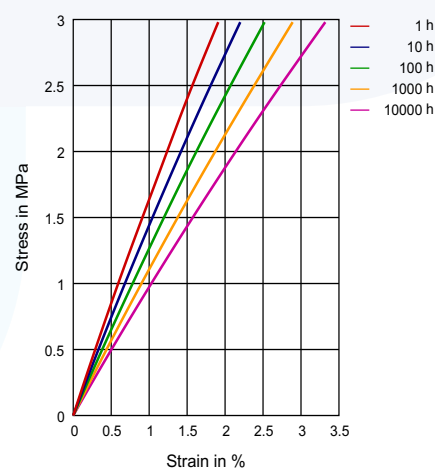


Arkema France - A French "société anonyme", registered in the Nanterre (France) Trade and Companies Register under the number 319 632 790
SDC/11-2018

Please consult Arkema's disclaimer regarding the use of Arkema's products on <https://www.arkema.com/en/products/product-safety/disclaimer/index.html>

RILSAN®
BY ARKEMA

RILSAN® BESNO P20 TL

CREEP MODULUS-TIME 40°C

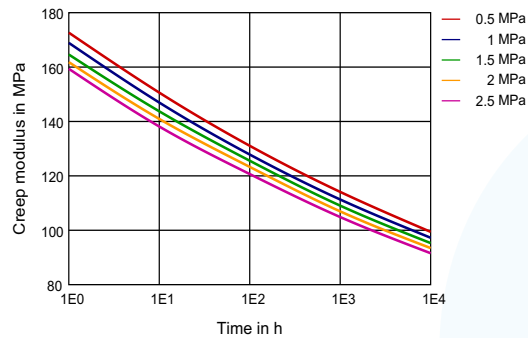

Processing conditions:

- Typical melt temperature (Min / Recommended / Max) : 230°C / 250°C / 280°C.
- Drying time and temperature (only necessary for bags opened for more than two hours) : 4-8 hours at 80-90°C.

PROCESSING

Profile Extrusion, Other Extrusion

DELIVERY FORM

Pellets

ADDITIVES

Lubricants, Plasticizer

SPECIAL CHARACTERISTICS

Bio-Based, Heat Stabilized, Light Stabilized

REGIONAL AVAILABILITY

North America, Europe, Asia Pacific, South and Central America, Near East/Africa

Please consult Arkema's disclaimer regarding the use of Arkema's products on <https://www.arkema.com/en/products/product-safety/disclaimer/index.html>

Rilsan® is a registered trademark of Arkema
© 2022 Arkema Inc. All rights reserved.

rilsan.com

Arkema Inc. – Technical Polymers

900 First Avenue
King of Prussia, PA 19406
Tel.: +1 610 205 7000
Fax: +1 610 205 7497
arkema-america.com

RILSAN®
BY **ARKEMA**

Headquarters: Arkema France

420, rue d'Estienne d'Orves
92705 Colombes Cedex – France
Tel.: +33 1 49 00 80 80
Fax: +33 1 49 00 83 96
arkema.com