

RILSAN® CLEAR G170 MED

PA,,MT,C12-020

Rilsan® Clear G170 MED is a high performance transparent polyamide resin with outstanding thermal resistance. This grade offers the highest quality and is specifically designed to meet the stringent requirements of the medical applications. Upon request letters regarding USP class VI compliance can be provided.

MAIN CHARACTERISTICS

PROPERTIES	DRY / COND	UNIT	TEST STANDARD
RHEOLOGICAL PROPERTIES			
Melt Volume-Flow Rate	2 / *	cm ³ /10min	ISO 1133
Temperature	275 / *	°C	-
Load	2.16 / *	kg	-
Molding Shrinkage, parallel	0.7 / *	%	ISO 294-4, 2577
Molding Shrinkage, normal	0.7 / *	%	ISO 294-4, 2577
MECHANICAL PROPERTIES			
Tensile Modulus	2100 / 2020	MPa	ISO 527-1/-2
Yield stress	76 / 74	MPa	ISO 527-1/-2
Yield strain	8 / 9	%	ISO 527-1/-2
Nominal Strain at Break	>50 / >50	%	ISO 527-1/-2
Shore D Hardness, 15s	79 / *	-	ISO 7619-1
Charpy Impact Strength, +23°C	- / No Break	kJ/m ²	ISO 179/1eU
Charpy Impact Strength, -30°C	No Break / No Break	kJ/m ²	ISO 179/1eU
Charpy Notched Impact Strength, +23°C	- / 13	kJ/m ²	ISO 179/1eA
Charpy Notched Impact Strength, -30°C	- / 13	kJ/m ²	ISO 179/1eA
THERMAL PROPERTIES			
Glass Transition Temperature, 10°C/min	168 / *	°C	ISO 11357-1/-2
Temp. of Deflection Under Load, 1.80 MPa	136 / *	°C	ISO 75-1/-2
Temp. of Deflection Under Load, 0.45 MPa	150 / *	°C	ISO 75-1/-2
Vicat Softening Temperature, 50°C/h 50N	160 / *	°C	ISO 306
Coeff. of Linear Thermal Expansion, parallel	70 / *	E-6/K	ISO 11359-1/-2
Burning Behav. at 1.5 mm Nominal Thickness	V-2 / *	class	IEC 60695-11-10
Thickness Tested	1.6 / *	mm	-
Burning Behav. at Thickness h	HB / *	class	IEC 60695-11-10
Thickness Tested	0.8 / *	mm	-
Oxygen Index	26 / *	%	ISO 4589-1/-2
ELECTRICAL PROPERTIES			
Volume Resistivity	- / 1E11	Ohm*m	IEC 60093
Surface Resistivity	* / 1E12	Ohm	IEC 60093

Arkema France - A French "société anonyme", registered in the Nanterre (France) Trade and Companies Register under the number 319 632 790 SJC/11-2018

Please consult Arkema's disclaimer regarding the use of Arkema's products on <https://www.arkema.com/en/products/product-safety/disclaimer/index.html>

RILSAN®
CLEAR
BY ARKEMA

RILSAN® CLEAR G170 MED

Dielectric (Electric) Strength	- / 50	kV/mm	IEC 60243-1
Comparative Tracking Index	* / 600	-	IEC 60112
OTHER PROPERTIES			
Water Absorption	3.8 / *	%	Sim. to ISO 62
Humidity Absorption	1.7 / *	%	Sim. to ISO 62
Density	1050 / 1050	kg/m ³	ISO 1183
OPTICAL PROPERTIES			
Luminous Transmittance	91	%	ISO 13468-1, -2

MAIN APPLICATIONS:

- Medical perfusion tube accessories
- reathing mask

PACKAGING:


This grade is delivered dried in sealed packaging (25 kg bags) ready to be processed.

SHELF LIFE:


Two years from the delivery. For any use above this limit, please refer to our technical services.

DIAGRAMS

VISCOSITY-SHEAR RATE

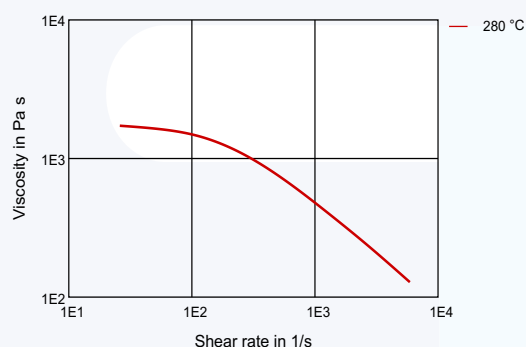

SHEARSTRESS-SHEAR RATE

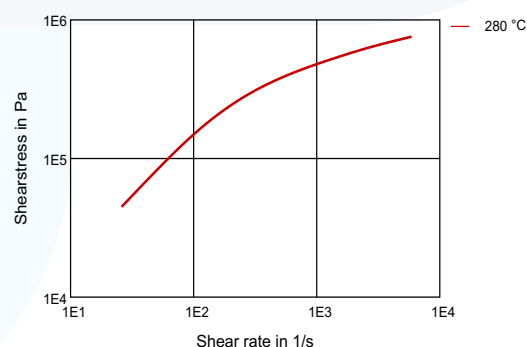


Arkema France - A French "société anonyme", registered in the Nanterre (France) Trade and Companies Register under the number 319 632 790 SJC/11-2018

Please consult Arkema's disclaimer regarding the use of Arkema's products on <https://www.arkema.com/en/products/product-safety/disclaimer/index.html>


RILSAN®
CLEAR
BY ARKEMA

RILSAN® CLEAR G170 MED


DYNAMIC SHEAR MODULUS-TEMPERATURE

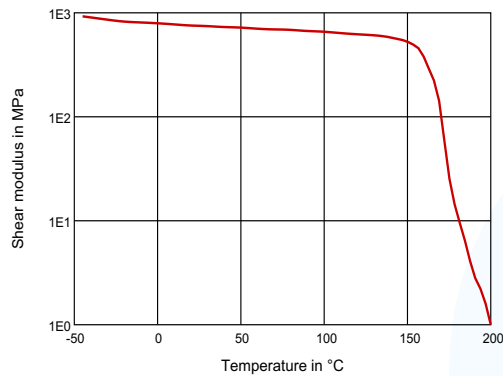


DYNAMIC TENSILE MODULUS-TEMPERATURE

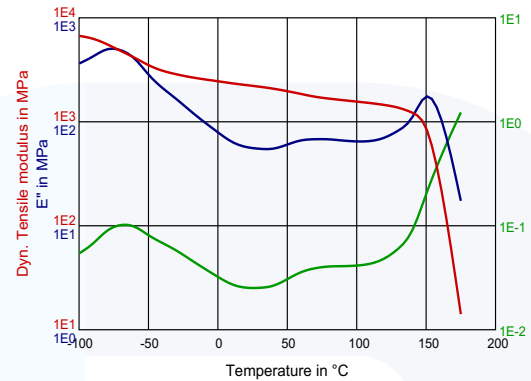

STRESS-STRAIN

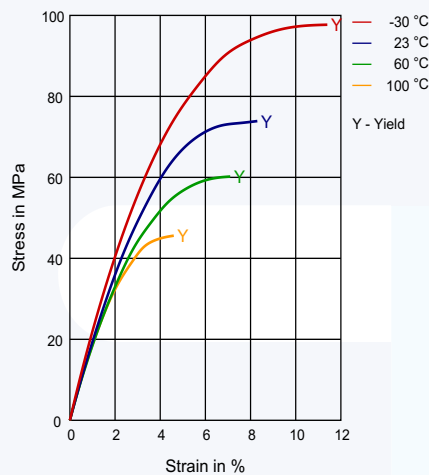

SECANT MODULUS-STRAIN

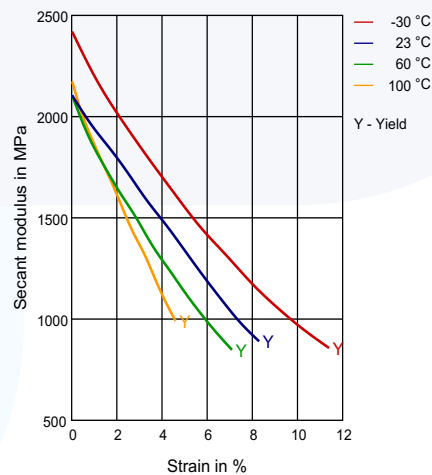

Injection molding conditions:

- Typical melt temperature (Min / Recommended / Max) : 270°C / 290°C / 310°C
- Typical mold temperature : 40 - 80 °C
- Drying time and temperature (only for bags opened for more than two hours): 4 - 6 hours at 90°C

Extrusion conditions:

- Typical melt temperature (Min / Recommended / Max) : 270°C / 280°C / 290°C
- Drying time and temperature (only for bags opened for more than two hours): 4 - 6 hours at 90°C

PROCESSING

Injection Molding, Other Extrusion

SPECIAL CHARACTERISTICS

Transparent

Please consult Arkema's disclaimer regarding the use of Arkema's products on <https://www.arkema.com/en/products/product-safety/disclaimer/index.html>

RILSAN®
CLEAR
BY ARKEMA

RILSAN® CLEAR G170 MED

DELIVERY FORM

Pellets

REGIONAL AVAILABILITY

North America, Europe, Asia Pacific, South and Central America, Near East/Africa

Arkema France - A French "société anonyme", registered in the Nanterre (France) Trade and Companies Register under the number 319 632 790
SIC/11-2018

Please consult Arkema's disclaimer regarding the use of Arkema's products on <https://www.arkema.com/en/products/product-safety/disclaimer/index.html>

Rilsan® Clear is a registered trademark of Arkema
© 2022 Arkema Inc. All rights reserved.

rilsamid.com

Arkema Inc. – Technical Polymers

900 First Avenue
King of Prussia, PA 19406
Tel.: +1 610 205 7000
Fax: +1 610 205 7497
arkema-america.com

RILSAN®
CLEAR
BY **ARKEMA**

Headquarters: Arkema France

420, rue d'Estienne d'Orves
92705 Colombes Cedex – France
Tel.: +33 1 49 00 80 80
Fax: +33 1 49 00 83 96
arkema.com