

PRODUCT DATA SHEET

29.02.2016 Ed.3

Plastomer/Elastomer **Queo™ 8210**

Description

Queo 8210 is an ethylene based octene-1 plastomer, produced in a solution polymerisation process using a metallocene catalyst.

CAS-No. 26221-73-8

Applications

Queo 8210 Demonstrated applications include:

Compounds
Extrusion coating
Halogen free flame retardant compounds

Impact modification of injection moulded PP
Soft foams, e.g. artificial wine corks
Sound deadening sheets

Additives

Queo 8210 contains processing stabilizers

Special Features

Queo 8210 is optimised to deliver:

Outstanding toughness
Outstanding puncture resistance
Low temperature impact strength
High flexibility and surface softness

Low temperature flex-cracking and impact resistance
High clarity
High filler and oil acceptance

Physical Properties

Property	Typical Value	Test Method
Data should not be used for specification work		
Density (23 °C)	883 kg/m ³	ISO 1183
Melt Flow Rate (190 °C/2,16 kg)	10 dg/min	ISO 1133
Flexural Modulus ¹	24 MPa	ISO 178
Tensile Strength ¹	13 MPa	ISO 527-2
Elongation at Break ¹	1000 %	ISO 527-2
Melting temperature (DSC)	75 °C	ISO 11357-3
Vicat softening temperature (10 N)	45 °C	ISO 306
Brittleness temperature	< -90 °C	ASTM D 746
Environmental Stress Crack Resistance () ¹	> 1.000 hrs	ASTM D 1693-B
Izod Impact Strength, notched (23 °C) ¹	No break	ISO 180/1A
Hardness, Shore A	84	ISO 868
Hardness, Shore D	< 30	ISO 868
Coating Speed	430 m/min	Internal method
Total Neck-in ²	6,9 cm	Internal method

¹ Measured on moulded plaques.

² at 100 m/min

Queo is a trademark of the Borealis group.


Borealis AG | Wagramer Strasse 17-19 | 1220 Vienna | Austria
Telephone +43 1 224 00 0 | Fax +43 1 22 400 333
FN 269858a | CCC Commercial Court of Vienna | Website www.borealisgroup.com

PRODUCT DATA SHEET

29.02.2016 Ed.3

Plastomer/Elastomer

Queo 8210

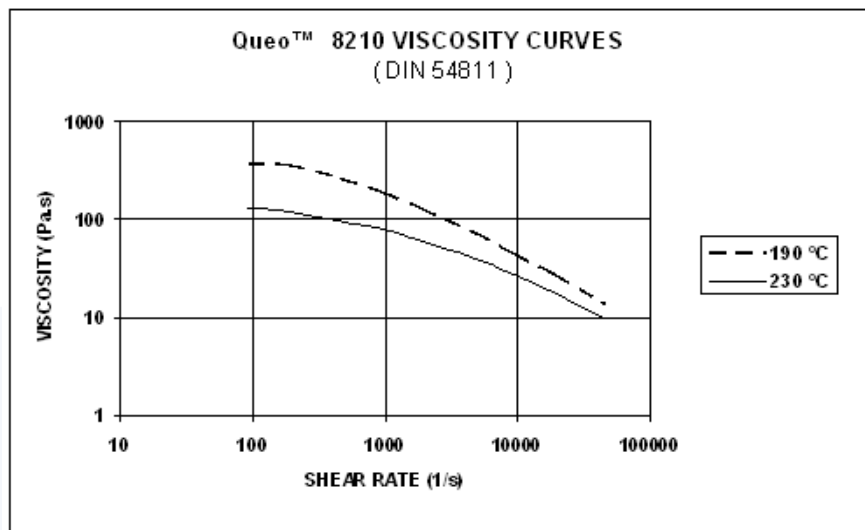

Storage

Queo 8210 This polymer, like most polymers, is combustible so the usual precautions concerning ignition sources should be taken in warehouses and storage rooms. Where large quantities are kept in store, it is necessary to observe the normal rules for orderly stock control and it is recommended to use the first in – first out (FIFO) principle for stock planning. The products should be stored in a dry and clean facility to prevent contamination and not be exposed to direct sunlight as this may lead to quality deterioration. These materials have a shelf life of at least 3 (three) years after date of production, provided the material remains in its original unopened packaging and are stored under the storage conditions as described in this document. "Shelf life" means that there will not be any substantial difference compared to the agreed specification. The date of batch creation can be derived from the batch code printed on the bags representing. YYMMDDHLL (LL being two letters with no reference to the production time). Borealis Plastomers generally does not sell prime material older than 2 (two) years unannounced. The lower density Queo materials (< 880 kg/m³) are more sensitive to temperatures. Therefore the following specific storage and handling guidelines have to be taken into account

- The product should not be stored for extended periods or transferred at ambient temperatures greatly exceeding 25 degrees Celsius.
- The products should not be stacked when in bags or super sacks

Related Documents

The following related documents are available on request, and represent various aspects on the usability, safety, recovery and disposal of the product.

"Safety data sheet" / "Product safety information sheet"
Statement on chemicals, regulations and standards

Borealis AG | Wagramer Strasse 17-19 | 1220 Vienna | Austria
Telephone +43 1 224 00 0 | Fax +43 1 22 400 333
FN 269858a | CCC Commercial Court of Vienna | Website www.borealisgroup.com

PRODUCT DATA SHEET

29.02.2016 Ed.3

 Plastomer/Elastomer
Queo 8210

General statement on compliance to food contact regulations
Statement on polymer additives and BSE

Disclaimer

The product(s) mentioned herein are not intended to be used for medical, pharmaceutical or healthcare applications and we do not support their use for such applications.

To the best of our knowledge, the information contained herein is accurate and reliable as of the date of publication; however we do not assume any liability whatsoever for the accuracy and completeness of such information.

Borealis makes no warranties which extend beyond the description contained herein. Nothing herein shall constitute any warranty of merchantability or fitness for a particular purpose.

It is the customer's responsibility to inspect and test our products in order to satisfy itself as to the suitability of the products for the customer's particular purpose. The customer is responsible for the appropriate, safe and legal use, processing and handling of our products.

No liability can be accepted in respect of the use of any Borealis product in conjunction with any other products and/or materials. The information contained herein relates exclusively to our products when not used in conjunction with any other material unless as specifically provided for in the test methods stated above.

Borealis AG | Wagramer Strasse 17-19 | 1220 Vienna | Austria
Telephone +43 1 224 00 0 | Fax +43 1 22 400 333
FN 269858a | CCC Commercial Court of Vienna | Website www.borealisgroup.com