

kuraray

Kuraray Poval™

Mowiflex™ LP M 05

Technical Data Sheet

Characteristics

Thermoplastic polyvinyl alcohol; medium temperature (ca. 50°C) water soluble

Recommended Uses

Development grade for injection molding

Form Supplied


Pellets

Specifications

The data are determined by our quality control for each lot prior release.

Melt flow Index (190°C, 2,16kg) [g/10min]	Melting temperature [°C]	Glass transition temperature [°C]	Bulk density [g/cm³]	Volatiles content [wt.%]	Methanol content [wt.%]
2-8	195	45	0.6-0.9	<1	<1

Viscosity curves of Mowiflex™ LP M 05 determined by capillary rheometry

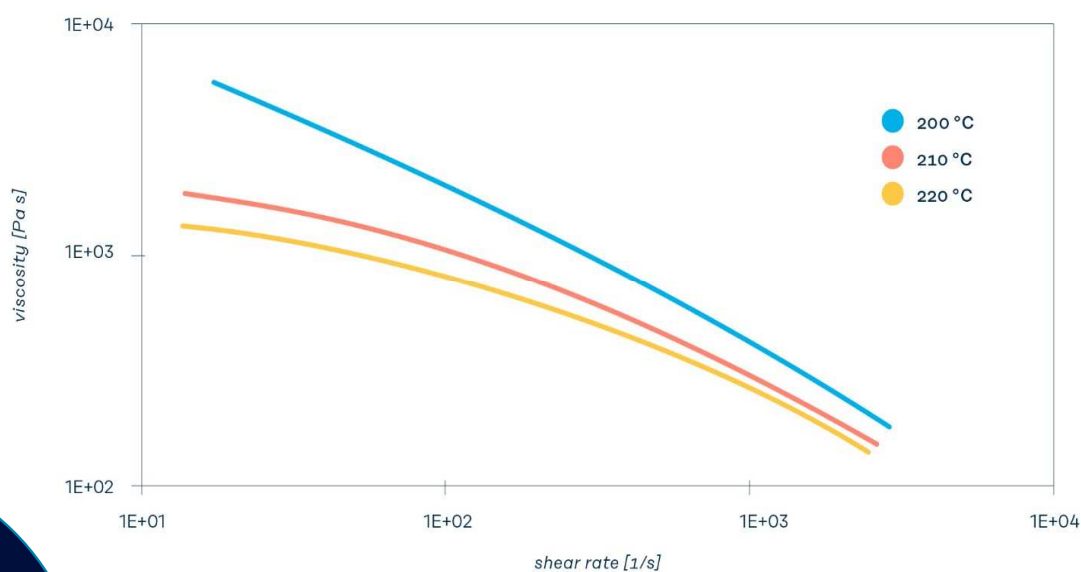

kuraray**Kuraray Poval™**

Mowiflex™ LP M 05

Technical Data Sheet

Processing

Mowiflex™ LP M 05 should be processed at temperatures between 200 and 220°C. The material absorbs moisture once the packaging is opened and should therefore be processed only from unopened original containers. Otherwise bubbles may occur in the product. Damp material can be dried at 60-80°C for 6-8 hours in a circulating-air dryer. Dry content can be determined shortly before extrusion, e.g. by using an infrared moisture analyzer.

Melt temperature during extrusion should not exceed 225°C because at higher temperatures the material suffers thermal damage, recognizable by yellow discoloration and an increase in melt pressure and torque. Residence time should be held as short as possible, 5 -10 minutes at most. When extruder operation has to be stopped temporarily it is highly recommended to completely purge out Mowiflex™ resins from the extruder.

For more detailed information please refer to the Mowiflex™ Processing and Application guide, which is available on request.

Material change and extruder cleaning

To remove Mowiflex™ from the extruder it should be purged with a polyolefin (e.g. LDPE) of similar or lower melt flow index until all Mowiflex™ is removed from the extruder. Depending on the extruder design and if purging is not sufficient, however, this can leave Mowiflex™ residues in the barrel and/or die, which can then crosslink or degrade under the influence of heat. In this case it is advisable to dismantle the extruder for cleaning.

Before starting Mowiflex™ processing it is recommended to purge the extruder with a high melt flow index polyolefin (e.g. LDPE). Subsequently, the extruder should be purged with Mowiflex™ until the polyolefin is completely removed from the extruder.

Storage

Mowiflex™ resins are dried after production and packaged in moisture proof bags. This means that no drying is needed when the material is used from fresh bags. The bags should be stored indoors under dry conditions. Open bags should be resealed after use. When exposed to the atmosphere Mowiflex™ will absorb moisture, which might result in foam or bubble formation during processing. Damp material can be dried at 60-80°C in conventional circulating air dryers. To estimate the moisture content of Mowiflex™ the volatiles content can be measured with an infrared moisture analyzer at 105°C for 10 minutes. The result of the volatiles content measurement will not perfectly equal the moisture content, due to partial evaporation of plasticizer. Usually a volatiles content of <0.4% will be sufficient.

kuraray**Kuraray Poval™****Mowiflex™ LP M 05****Technical Data Sheet****Occupational safety and environmental protection**

Mowiflex™ LP M 05 is not a dangerous substance or preparation as defined by German chemical law or dangerous goods regulations or EC regulation 1272/2008 (CLP regulation) in their current versions.

A safety data sheet is available on request.

For further information please contact: mowiflex@kuraray.com

Kuraray Europe GmbH
Philipp-Reis-Str. 4
65795 Hattersheim am Main
Germany
Phone: +49 69 305 85351
Web: <https://www.kuraray-poal.com/>
pva@kuraray.com