

Technical Data Sheet



Centrex 825A

Acrylonitrile Styrene Acrylate
LyondellBasell Industries
Engineering Plastics

General			
Material Status	• Commercial: Active		
Availability	• North America		
Features	• Good Melt Strength • Good Weather Resistance	• High Gloss • High Impact Resistance	• UV Resistant
Uses	• Marine Applications • Outdoor Applications	• Sheet • Spas	• Water Sports Equipment
UL File Number	• E51193		
Forms	• Pellets		
Processing Method	• Extrusion	• Sheet Extrusion	• Thermoforming
Physical	Nominal Value (English)	Nominal Value (SI)	Test Method
Density / Specific Gravity	1.05	1.05 g/cm³	ASTM D792
Melt Mass-Flow Rate (MFR)			ASTM D1238
220°C/10.0 kg	12 g/10 min	12 g/10 min	
230°C/3.8 kg	3.0 g/10 min	3.0 g/10 min	
Outdoor Suitability (All Colors)	f2	f2	UL 746C
Mechanical	Nominal Value (English)	Nominal Value (SI)	Test Method
Tensile Modulus ¹	330000 psi	2280 MPa	ASTM D638
Tensile Strength ¹ (Yield)	6400 psi	44.1 MPa	ASTM D638
Tensile Elongation (Yield)	2.7 %	2.7 %	ASTM D638
Flexural Modulus - Tangent ²	305000 psi	2100 MPa	ASTM D790
Flexural Strength ²	7000 psi	48.3 MPa	ASTM D790
Impact	Nominal Value (English)	Nominal Value (SI)	Test Method
Notched Izod Impact			ASTM D256
-22°F (-30°C), 0.125 in (3.18 mm)	1.7 ft·lb/in	91 J/m	
0°F (-18°C), 0.125 in (3.18 mm)	2.1 ft·lb/in	110 J/m	
73°F (23°C), 0.125 in (3.18 mm)	4.0 ft·lb/in	210 J/m	
Thermal	Nominal Value (English)	Nominal Value (SI)	Test Method
Deflection Temperature Under Load			ASTM D648
264 psi (1.8 MPa), Unannealed, 0.125 in (3.18 mm)	172 °F	77.7 °C	
CLTE			ASTM D696
Flow : -40 to 104°F (-40 to 40°C)	4.5E-5 in/in/°F	8.1E-5 cm/cm/°C	
Transverse : -40 to 40°F (-40 to 4°C)	6.0E-5 in/in/°F	1.1E-4 cm/cm/°C	
RTI Elec			UL 746B
0.030 in (0.75 mm)	122 °F	50.0 °C	
0.06 in (1.5 mm)	122 °F	50.0 °C	
0.12 in (3.0 mm)	122 °F	50.0 °C	
RTI Imp			UL 746B
0.030 in (0.75 mm)	122 °F	50.0 °C	
0.06 in (1.5 mm)	122 °F	50.0 °C	
0.12 in (3.0 mm)	122 °F	50.0 °C	
RTI Str			UL 746B
0.030 in (0.75 mm)	122 °F	50.0 °C	
0.06 in (1.5 mm)	122 °F	50.0 °C	
0.12 in (3.0 mm)	122 °F	50.0 °C	

Technical Data Sheet

**Centrex 825A**

Acrylonitrile Styrene Acrylate
LyondellBasell Industries
Engineering Plastics


Electrical	Nominal Value (English)	Nominal Value (SI)	Test Method
Hot-wire Ignition (HWI)			UL 746A
0.030 in (0.75 mm)	PLC 4	PLC 4	
0.06 in (1.5 mm)	PLC 3	PLC 3	
0.12 in (3.0 mm)	PLC 2	PLC 2	
Flammability	Nominal Value (English)	Nominal Value (SI)	Test Method
Flame Rating			UL 94
0.030 in (0.75 mm), Natural	HB	HB	
0.06 in (1.5 mm), All Colors	HB	HB	
0.12 in (3.0 mm), All Colors	HB	HB	
Optical	Nominal Value (English)	Nominal Value (SI)	Test Method
Gloss (60°, High Gloss Surface, Untextured)	90 to 100	90 to 100	ASTM D2457

Technical Data Sheet



Centrex 825A

Acrylonitrile Styrene Acrylate
LyondellBasell Industries
Engineering Plastics

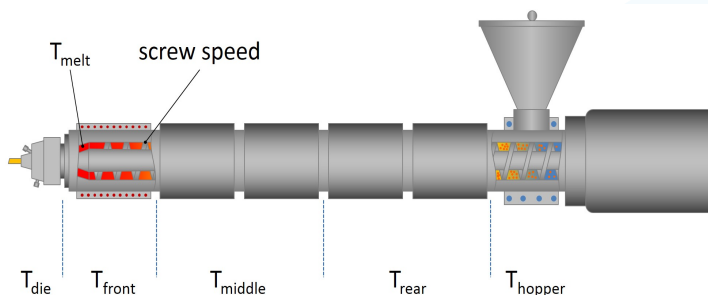

Extrusion	Nominal Value (English)	Nominal Value (SI)
Drying Temperature	180 to 200 °F	82 to 93 °C
Drying Time	3.0 to 4.0 hr	3.0 to 4.0 hr
Suggested Max Moisture	< 0.02 %	< 0.02 %
Suggested Max Regrind	40 %	40 %

Extrusion Notes

Polish roll Top: Down stack 200°F, Up stack 200°F
Polish roll Middle: Down stack 165°F, Up stack 190°F
Polish roll Bottom: Down stack 200°F, Up stack 180°F

Extruder Temperature Profile

Screw Design: 3:1 Compression Ratio

Feed Throat: Cool water to prevent pellet bridging in the hopper feed throat

Extruder Zone 1: 400-415 F

Extruder Zone 2: 415-425 F

Extruder Zone 3: 420-430 F

Extruder Zone 4: 430-445 F

Extruder Zone 5: 420-430 F

Extruder Zone 6: 420-430 F

Extruder Zone 7: 420-430 F

Breaker Plate: 20/40/80/60/20

Gate: 425-450 F

Melt Temperature: 430-470 F

Melt Pump: 430-450 F

Co-ex block: 425-450 F

Die: Top: 425-450 F

Bottom: 425-450 F

Questions: Contact your AR/DE TS specialist for assistance.

Technical Data Sheet



Centrex 825A

Acrylonitrile Styrene Acrylate
LyondellBasell Industries
Engineering Plastics

Notes

¹ 0.20 in/min (5.1 mm/min)

² 0.050 in/min (1.3 mm/min)

Notes

These are typical property values not to be construed as specification limits.

Processing Techniques

Specific recommendations for resin type and processing conditions can only be made when the end use, required properties and fabrication equipment are known.

Product Storage and Handling

- Product should be stored in dry conditions at temperatures below 50°C and protected from UV-light
- Improper storage may bring damage to the packaging and can negatively affects on the quality of this product
- Keep material completely dry for good processing

Company Information

For further information regarding the LyondellBasell company, please visit <http://www.lyb.com/>.

© LyondellBasell Industries Holdings, B.V. 2024

Disclaimer

Information in this document is accurate to the best of our knowledge at the date of publication. The document is designed to provide users general information for safe handling, use, processing, storage, transportation, disposal and release and does not constitute any warranty or quality specification, either express or implied, including any warranty of merchantability or fitness for any particular purpose. Users shall determine whether the product is suitable for their use and can be used safely and legally.

In addition to any prohibitions of use specifically noted in this document, LyondellBasell may further prohibit or restrict the sale of its products into certain applications. For further information, please contact a LyondellBasell representative.

Trademarks

The Trademark referenced within the product name is owned or used by the LyondellBasell family of companies.