

Technical Data Sheet



Duragrip DGR 6070NC

Thermoplastic Elastomer
LyondellBasell Industries
Engineering Plastics

Product Description

DuraGrip® DGR 6070NC is designed to be a general-purpose Thermoplastic Elastomer (TPE) that is easy to use in an injection molding process. DGR 6070NC has an excellent soft touch feel, will bond to olefins, is easy to color, and is available in FDA compliant formulations. DuraGrip® is not hygroscopic and under normal conditions does not require drying.

General

Material Status	• Commercial: Active		
Availability	• Asia Pacific	• Europe	• North America
Features	• General Purpose	• Good Colorability	
Forms	• Pellets		
Processing Method	• Injection Molding		

Physical	Nominal Value (English)	Nominal Value (SI)	Test Method
Density / Specific Gravity			
--	0.990	0.988 g/cm³	ASTM D792
--	0.988 g/cm³	0.988 g/cm³	ISO 1183
Mechanical	Nominal Value (English)	Nominal Value (SI)	Test Method
Taber Abrasion Resistance			ASTM D1044
1000 Cycles, 1.0E+6 g, CS-17 Wheel	10.0 mg	10.0 mg	
Elastomers	Nominal Value (English)	Nominal Value (SI)	Test Method
Tensile Set (100% Strain)	15 %	15 %	ASTM D412
Tensile Stress			
100% Strain	242 psi	1.67 MPa	ASTM D412
100% Strain, 73°F (23°C)	242 psi	1.67 MPa	ISO 37
Tensile Strength (Yield, 73°F (23°C))	1140 psi	7.83 MPa	ASTM D412 ISO 37
Tensile Elongation			
Break	370 %	370 %	ASTM D412
Break, 73°F (23°C)	370 %	370 %	ISO 37
Tear Strength ¹ (75°F (24°C))	149 lbf/in	26.1 kN/m	ASTM D624
Compression Set			ASTM D395B ISO 815
75°F (24°C), 22 hr	27 %	27 %	
158°F (70°C), 22 hr	45 %	45 %	
212°F (100°C), 22 hr	72 %	72 %	
Hardness	Nominal Value (English)	Nominal Value (SI)	Test Method
Durometer Hardness (Shore A, 5 sec)	68	68	ASTM D2240 ISO 868
Thermal	Nominal Value (English)	Nominal Value (SI)	Test Method
Brittleness Temperature	-85.0 °F	-65.0 °C	ASTM D746 ISO 812
Aging	Nominal Value (English)	Nominal Value (SI)	Test Method
Change in Tensile Strength in Air			
158°F (70°C), 168 hr	-9.0 %	-9.0 %	ASTM D573 ISO 188
100% Strain, 158°F (70°C), 168 hr	-4.0 %	-4.0 %	ASTM D573
212°F (100°C), 168 hr	-11 %	-11 %	ASTM D573 ISO 188
100% Strain, 212°F (100°C), 168 hr	-2.0 %	-2.0 %	ASTM D573
100% Strain 158°F (70°C), 168 hr	-4.0 %	-4.0 %	ISO 188
100% Strain 212°F (100°C), 168 hr	-2.0 %	-2.0 %	ISO 188

Technical Data Sheet

**Duragrip DGR 6070NC**

Thermoplastic Elastomer
LyondellBasell Industries
Engineering Plastics

Aging	Nominal Value (English)	Nominal Value (SI)	Test Method
Change in Ultimate Elongation in Air			ASTM D573
158°F (70°C), 168 hr	2.0 %	2.0 %	
212°F (100°C), 168 hr	3.0 %	3.0 %	
Change in Tensile Strain at Break			ISO 1817
158°F (70°C), 168 hr	2.0 %	2.0 %	
212°F (100°C), 168 hr	3.0 %	3.0 %	
Change in Volume			ASTM D471 ISO 1817
75°F (24°C), 168 hr, in Reference Fuel B	9.0 %	9.0 %	
212°F (100°C), 168 hr, in ASTM #1 Oil	2.0 %	2.0 %	
212°F (100°C), 168 hr, in IRM 903 Oil	38 %	38 %	
212°F (100°C), 168 hr, in Water	-7.0 %	-7.0 %	
Fill Analysis	Nominal Value (English)	Nominal Value (SI)	Test Method
Melt Viscosity (374°F (190°C), 300 sec ⁻¹)	104 Pa·s	104 Pa·s	ASTM D3835

Additional Information


The value listed as Density -Specific Gravity, ASTM D792, was tested in accordance with ASTM D471.
The value listed as Density, ISO 1183, was tested in accordance with ISO 2781.

Technical Data Sheet



Duragrip DGR 6070NC

Thermoplastic Elastomer
LyondellBasell Industries
Engineering Plastics

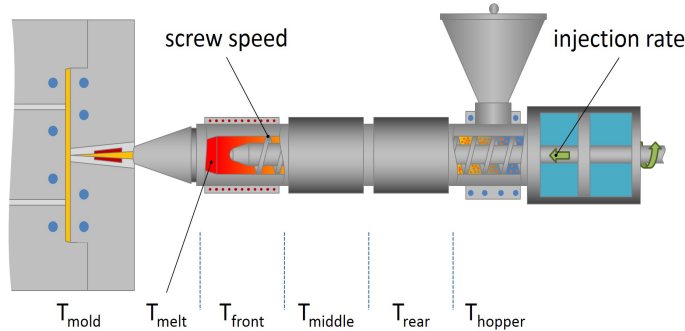

Injection	Nominal Value (English)	Nominal Value (SI)
Drying Temperature	150 °F	66 °C
Drying Time	3.0 hr	3.0 hr
Rear Temperature	370 to 390 °F	188 to 199 °C
Middle Temperature	390 to 410 °F	199 to 210 °C
Front Temperature	420 to 440 °F	216 to 227 °C
Nozzle Temperature	400 to 430 °F	204 to 221 °C
Processing (Melt) Temp	390 to 430 °F	199 to 221 °C
Mold Temperature	110 to 130 °F	43 to 54 °C
Injection Pressure	150 to 600 psi	1.03 to 4.14 MPa
Screw Speed	25 to 100 rpm	25 to 100 rpm

Injection Notes

DuraGrip® is not hygroscopic, under normal conditions does not require drying. Dry in a desiccant dryer if porosity is observed.

Injection Speed: 1 to 3 in³/sec

Injection Time (1st Stage/Boost): 0.5 to 4 sec

Second Stage Pressure: 150 to 300 psi

Second Stage Time: 3 to 10 sec

Cooling Time: 10 to 20 sec

Back Pressure: 20 to 75 %

Technical Data Sheet



Duragrip DGR 6070NC

Thermoplastic Elastomer
LyondellBasell Industries
Engineering Plastics

Notes

¹ Die C

Notes

These are typical property values not to be construed as specification limits.

Processing Techniques

Specific recommendations for resin type and processing conditions can only be made when the end use, required properties and fabrication equipment are known.

Product Storage and Handling

- Product should be stored in dry conditions at temperatures below 50°C and protected from UV-light
- Improper storage may bring damage to the packaging and can negatively affects on the quality of this product
- Keep material completely dry for good processing

Company Information

For further information regarding the LyondellBasell company, please visit <http://www.lyb.com/>.

© LyondellBasell Industries Holdings, B.V. 2024

Disclaimer

Information in this document is accurate to the best of our knowledge at the date of publication. The document is designed to provide users general information for safe handling, use, processing, storage, transportation, disposal and release and does not constitute any warranty or quality specification, either express or implied, including any warranty of merchantability or fitness for any particular purpose. Users shall determine whether the product is suitable for their use and can be used safely and legally.

In addition to any prohibitions of use specifically noted in this document, LyondellBasell may further prohibit or restrict the sale of its products into certain applications. For further information, please contact a LyondellBasell representative.

Trademarks

The Trademark referenced within the product name is owned or used by the LyondellBasell family of companies.