

PEBAX® 5533 SP 01

Polyether block amide **Pebax® 5533 SP 01 resin** is a thermoplastic elastomer made of flexible polyether and rigid polyamide. This SP grade has been developed to be heat and UV resistant.

MAIN CHARACTERISTICS

PROPERTIES	DRY / COND	UNIT	TEST STANDARD
RHEOLOGICAL PROPERTIES			
Molding Shrinkage, parallel	1.2 / *	%	ISO 294-4, 2577
Molding Shrinkage, normal	1.4 / *	%	ISO 294-4, 2577
MECHANICAL PROPERTIES			
Tensile Modulus	170 / 165	MPa	ISO 527-1/-2
Yield stress	12 / 12	MPa	ISO 527-1/-2
Yield strain	25 / 25	%	ISO 527-1/-2
Nominal Strain at Break	> 50 / > 50	%	ISO 527-1/-2
Stress at 10% Elongation	10 / *	MPa	ISO 527-1/-2
Stress at 100% Elongation	14 / *	MPa	ISO 527-1/-2
Strain at Break TPE	> 300 / *	%	ISO 527-1/-2
Stress at Break TPE	52 / *	MPa	ISO 527-1/-2
Compression Set at 23 °C, 24h	43 / *	%	ISO 815
Tear Strength	106 / *	kN/m	ISO 34-1
Abrasion Resistance	47 / *	mm ³	ISO 4649
Shore D Hardness, 15s	50 / *	-	ISO 7619-1
Charpy Impact Strength, +23°C	No Break / No Break	kJ/m ²	ISO 179/1eU
Charpy Impact Strength, -30°C	No Break / No Break	kJ/m ²	ISO 179/1eU
Charpy Notched Impact Strength, +23°C	No Break / No Break	kJ/m ²	ISO 179/1eA
Charpy Notched Impact Strength, -30°C	No Break / No Break	kJ/m ²	ISO 179/1eA
THERMAL PROPERTIES			
Melting Temperature, 10°C/min	159 / *	°C	ISO 11357-1/-3
Temp. of Deflection Under Load, 0.45 MPa	66 / *	°C	ISO 75-1/-2
Vicat Softening Temperature, 50°C/h 50N	142 / *	°C	ISO 306
Coeff. of Linear Thermal Expansion, parallel	170 / *	E-6/K	ISO 11359-1/-2
ELECTRICAL PROPERTIES			
Relative Permittivity, 100Hz	9 / -	-	IEC 60250
Relative Permittivity, 1MHz	5 / -	-	IEC 60250
Dissipation Factor, 100Hz	1110 / -	E-4	IEC 60250
Dissipation Factor, 1MHz	1020 / -	E-4	IEC 60250
Volume Resistivity	3.2E11 / -	Ohm*m	IEC 60093
Surface Resistivity	* / 3E12	Ohm	IEC 60093
Dielectric (Electric) Strength	38.5 / -	kV/mm	IEC 60243-1

Arkema France - A French "société anonyme", registered in the Nanterre (France) Trade and Companies Register under the number 319 632 790 SBC/11-2018

Please consult Arkema's disclaimer regarding the use of Arkema's products on <https://www.arkema.com/en/products/product-safety/disclaimer/index.html>

PEBAX®
BY ARKEMA

PEBAX® 5533 SP 01

Comparative Tracking Index	* / 600	-	IEC 60112
OTHER PROPERTIES			
Water Absorption	1.2 / *	%	Sim. to ISO 62
Humidity Absorption	0.6 / *	%	Sim. to ISO 62
Density	1010 / 1010	kg/m ³	ISO 1183
Spec. heat capacity of melt	2800	J/(kg K)	-
Thermal conductivity of melt	0.18	W/(m K)	-
Density of melt	830	kg/m ³	-

MAIN APPLICATIONS: • Athletic foot wear components • Ski shoes

• High performance power transmission belts

PACKAGING:


This grade is delivered dried in sealed packaging (20 or 25 kg bags) ready to be processed.

SHELF LIFE:


Two years from the delivery. For any use above this limit, please refer to our technical services.

DIAGRAMS

VISCOSITY-SHEAR RATE

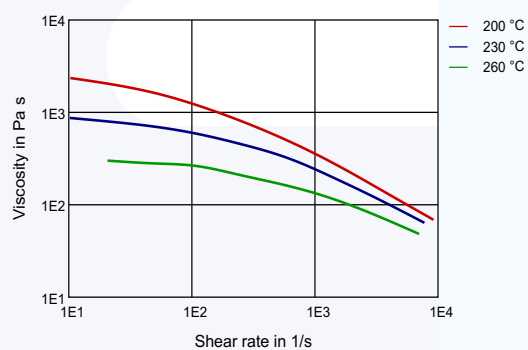

SHEARSTRESS-SHEAR RATE

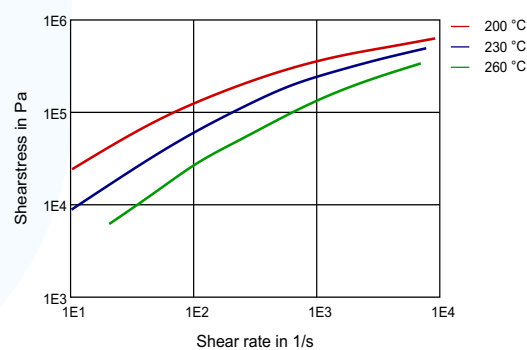


Arkema France - A French "société anonyme", registered in the Nanterre (France) Trade and Companies Register under the number 319 632 790 SBC/11-2018

Please consult Arkema's disclaimer regarding the use of Arkema's products on <https://www.arkema.com/en/products/product-safety/disclaimer/index.html>


PEBAX®
BY ARKEMA

PEBAX® 5533 SP 01


STRESS-STRAIN

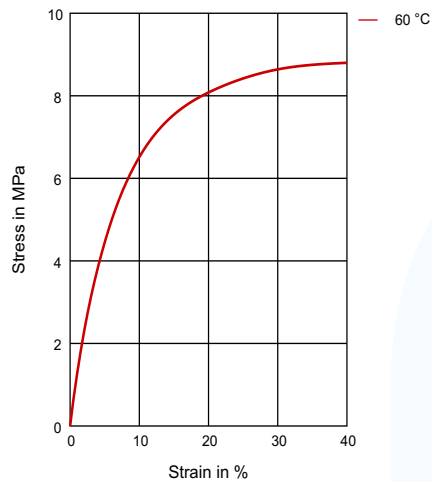


STRESS-STRAIN

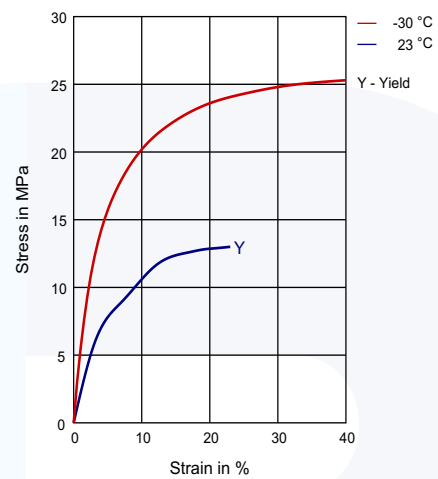

SECANT MODULUS-STRAIN

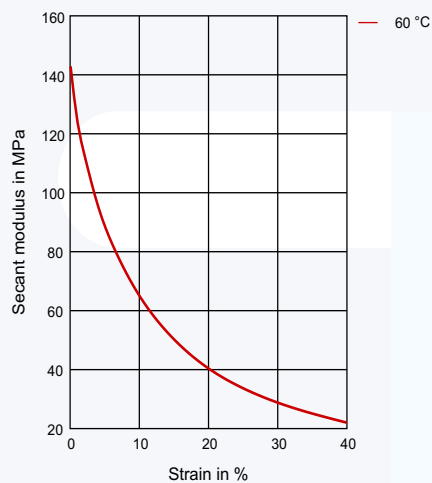


SECANT MODULUS-STRAIN

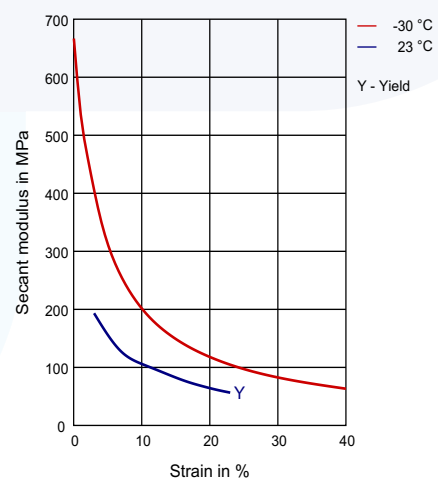


PEBAX® 5533 SP 01


STRESS-STRAIN (ISOCHRONOUS) 23°C

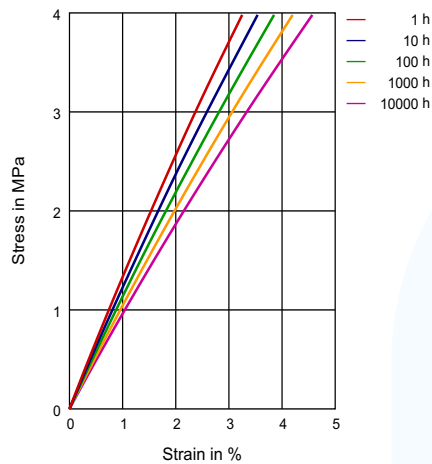


CREEP MODULUS-TIME 23°C

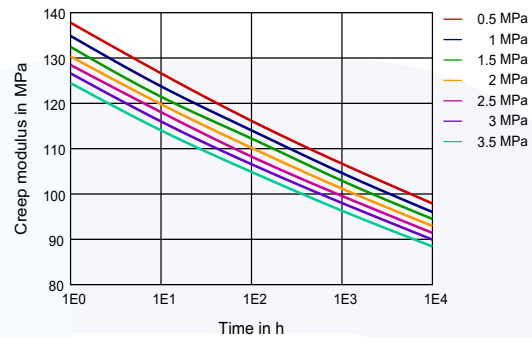

STRESS-STRAIN (ISOCHRONOUS) 40°C

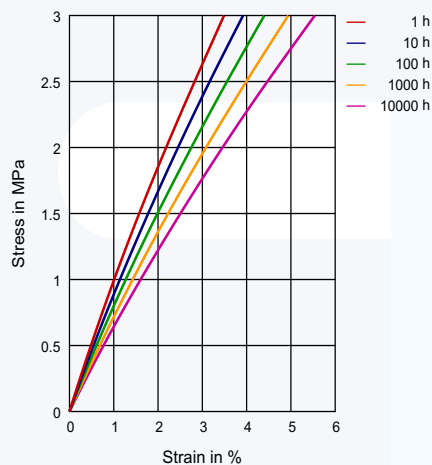

CREEP MODULUS-TIME 40°C

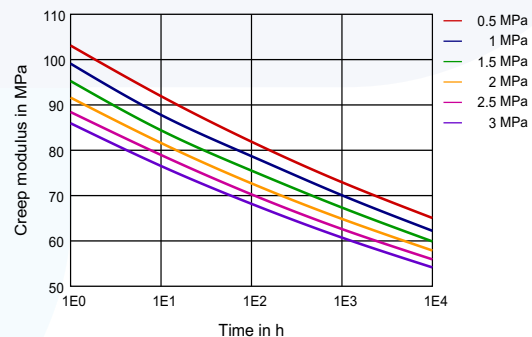


Arkema France - A French "société anonyme", registered in the Nanterre (France) Trade and Companies Register under the number 319 632 790 SBC/11-2018

Please consult Arkema's disclaimer regarding the use of Arkema's products on <https://www.arkema.com/en/products/product-safety/disclaimer/index.html>


PEBAX®
BY **ARKEMA**

PEBAX® 5533 SP 01


STRESS-STRAIN (ISOCHRONOUS) 60°C

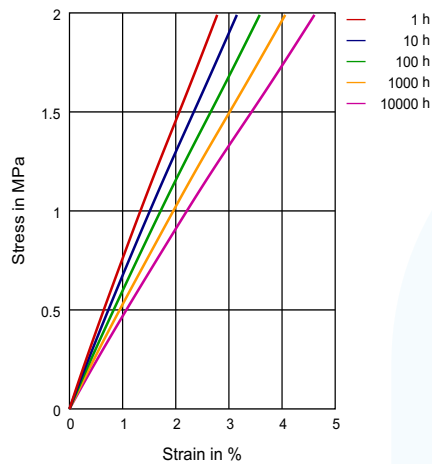


CREEP MODULUS-TIME 60°C

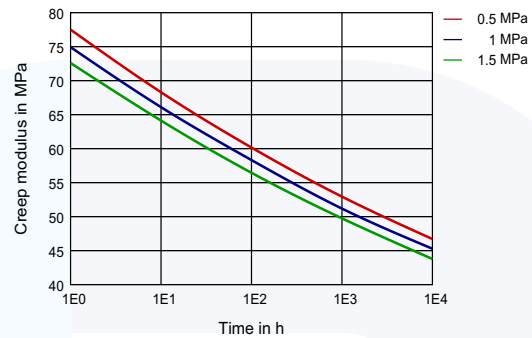

STRESS-STRAIN (ISOCHRONOUS) 80°C

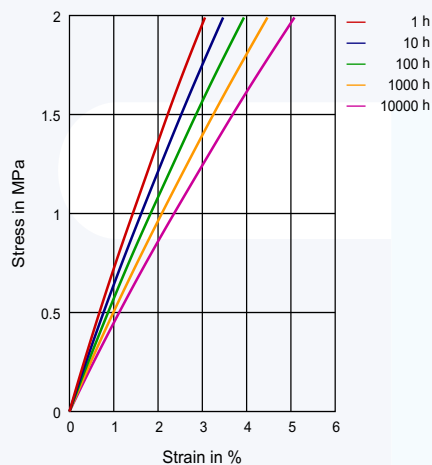

CREEP MODULUS-TIME 80°C

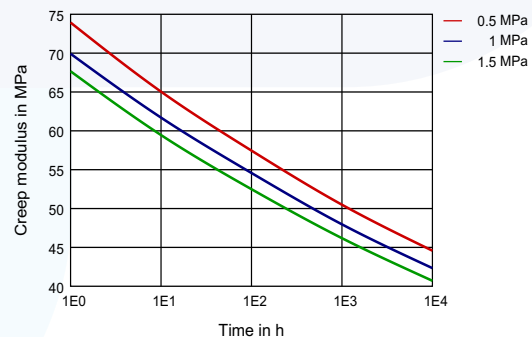


Arkema France - A French "société anonyme", registered in the Nanterre (France) Trade and Companies Register under the number 319 632 790 SBC/11-2018

Please consult Arkema's disclaimer regarding the use of Arkema's products on <https://www.arkema.com/en/products/product-safety/disclaimer/index.html>

PEBAX®
BY **ARKEMA**

PEBAX® 5533 SP 01

SPECIFIC VOLUME-TEMPERATURE (PVT)

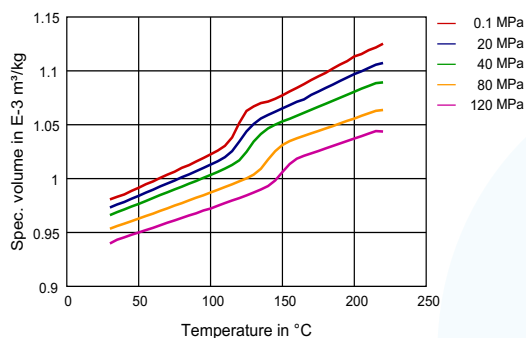

Processing conditions:

- Typical melt temperature (Min / Recommended / Max) : 200°C / 240°C / 270°C.
- Typical mold temperature : 25 – 60°C.
- Drying time and temperature (only necessary for bags opened for more than two hours) : 4-6 hours at 65-75°C.

Processing conditions:

- Typical melt temperature (Min / Recommended / Max) : 210°C / 220°C / 230°C
- Drying time and temperature (only necessary for bags opened for more than two hours) : 4-6 hours at 65-75°C

PROCESSING

Injection Molding, Film Extrusion, Profile Extrusion, Other Extrusion, Transfer Molding, Casting, Thermoforming

DELIVERY FORM

Pellets

SPECIAL CHARACTERISTICS

Heat Stabilized, Light Stabilized

REGIONAL AVAILABILITY

North America, Europe, Asia Pacific, South and Central America, Near East/Africa

Please consult Arkema's disclaimer regarding the use of Arkema's products on <https://www.arkema.com/en/products/product-safety/disclaimer/index.html>

Pebax® is a registered trademark of Arkema
© 2022 Arkema Inc. All rights reserved.

pebax.com

Arkema Inc. – Technical Polymers

900 First Avenue
King of Prussia, PA 19406
Tel.: +1 610 205 7000
Fax: +1 610 205 7497
arkema-america.com

PEBAX®
BY **ARKEMA**

Headquarters: Arkema France

420, rue d'Estienne d'Orves
92705 Colombes Cedex – France
Tel.: +33 1 49 00 80 80
Fax: +33 1 49 00 83 96
arkema.com