




PH 2621

POLYPROPYLENE HOMOPOLYMER

PROCESS: FIBER AND FILAMENT EXTRUSION

Apt for low-denier fiber extrusion elaborated using the Bulk Continuous Filaments (BCF) process and for cut-fiber produced with medium and high speed extrusion lines. It contains a special additive to provide excellent decoloration protection.

Applications: Cut fibers, low-denier multifilament fibers, rugs and bag handles.

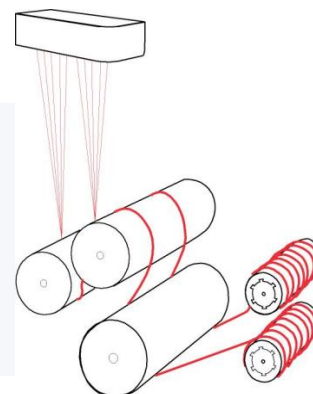

PROCESSING RECOMMENDATIONS

EXTRUSION

Screw	200 to 250 °C
Mold	240 to 250 °C

PROPERTIES

TYPICAL PROPERTIES	ASTM TEST METHOD	UNITS	VALUE
Flow Index 2.16 kg/230 °C	D-1238	g/10 min	27
VICAT Softening Point (10 N)	D-1525	°C	153
Heat Deflection Temperature – HDT (455 kPa)	D-648	°C	105
IZOD Impact Strength Test at 23 °C	D-256	J/m	20
Tensile Strength (at yield point)	D-638	MPa	36
Elongation (at yield point)	D-638	%	10
Flexural Modulus	D-790	MPa	1,550

The density of all grades of polypropylene produced by Petroquim S.A. is in the range of 0.905 +/- 0.005 g/cc.

SPECIAL CONSIDERATIONS:

- The above data correspond to typical values measured in our laboratory and should be understood to be only a guide in the selection and processing of the resin. For this reason, before using any material produced by Petroquim S.A, it is recommended that each user conduct, with the support of our specialized technicians, the necessary tests to determine whether the product is suitable for the intended use.
- Users must also ensure that they can use Petroquim's product as required by law and safely (the safety data sheet can be found at www.petroquim.cl).
- All the information regarding compliance with food contact regulations can be found on our website: www.petroquim.cl
- This product has not been validated by Petroquim S.A. for use in medical or pharmaceutical applications. It is the responsibility of the users to review compliance with the specific standards and legal regulations for this sector.
- Petroquim S.A. disclaims any liability that may arise from any misuse of this information, either directly or indirectly.
- The above values may be changed without prior notice.
- This version voids and supersedes previous versions.

REVISED: Apr/2023

e-mail: info@petroquim.cl
 Los Conquistadores 1700, piso 12
 Providencia - Santiago - Chile
 Fono: 56-2-23516700
www.petroquim.cl