



Product information

VESTOLIT® B 7090 Ultra

Polyvinyl chloride for paste processing


VESTOLIT B 7090 Ultra is a paste-forming micro-S-PVC copolymer which is suitable for producing pastes with almost Newtonian flow.

The general properties of B 7090 Ultra are particularly suited to the production of lowfusion temperature pastes for compact applications and for mechanically expandable foams.

Application	Solid	Foam
Coated fabrics		●
Floor coverings	●	●
Wallpapers, wall coverings	○	○
Canvas coating	○	
Unsupported layers, films	●	
Dipping, casting		
Spray coating		

● recommended ○ feasible

B 7090 Ultra/DINP-Ratio

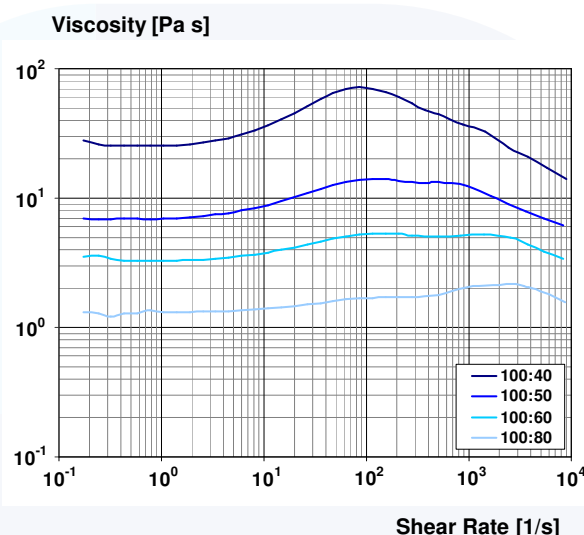

Viscosity as a function of the shear rate for various PVC/plasticiser ratios, measured in a rotary viscometer at 25 °C after 24 h ageing.

Property	Method	Unit	Value ¹⁾
K value	DIN EN ISO 1628-2	-	67
Viscosity number	DIN EN ISO 1628-2	cm ³ /g	112
Apparent bulk density	DIN EN ISO 60	g/cm ³	0.3
Sieve analysis - retained on 0.063 mm sieve	DIN EN ISO 1624	%	< 1
Water content according to K. Fischer	DIN 53 715	%	≤ 0.3
pH value of the aqueous extract	DIN EN ISO 1264	-	7
Paste viscosity 1.5 /s		Pa s	2.2
Paste viscosity 45 /s		Pa s	2.8

1) The figures quoted above are typical values, and do not form part of the specification.
100 parts PVC, 60 parts DINP - measured in a rotary viscometer with a defined shear gap at 25 °C after ageing for 2 hours.

The vinyl acetate content of approx. 5% in VESTOLIT B 7090 Ultra enables significantly improved fusion characteristics compared with comparable homopolymers. Due to its low viscosity and the excellent storage stability, B 7090 Ultra is recommended for all applications requiring a reduction in fusion temperature over

conventional processing conditions. Consequently, the main application fields are: sealing compounds for cars, the coating of temperature-sensitive substrates and adhesive layers. The good mechanical foaming properties of B 7090 Ultra also enable its inclusion in low-fusion temperature back foams in the CV field.

Version 09.2013

VESTOLIT GmbH • D 45753 Marl • P.O. Box 10 23 60
Phone: + 49 23 65 / 49 - 05 • Fax: + 49 23 65 / 49 - 40 00 • E-Mail: info@vestolit.de

This information is based on our present knowledge and experience. However, it implies no liability or other legal responsibility on our part, including with regard to existing third part patent rights in particular, no guarantee of properties in the legal sense is implied. We reserve the right to make any change according to technical progress of further developments. The customer is not released from the obligation to conduct careful inspection and testing of incoming goods. Reference to trade names used by other companies neither recommendation, nor is intended to suggest that similar products could be used. All our business transactions shall exclusively be governed by our General sales Conditions. ® = registered trademark