

RILSAN® BUM 30 0

PA11, MR, 18-020, GB30

Rilsan® BUM 30 0 resin is a glass bead reinforced polyamide 11 produced from a renewable source. The incorporation of glass beads yields a virtually isotropic reinforced product.

This natural grade dedicated to injection is specially designed for drinking water application: WRAS (UK).

The percentage of renewable carbon according to ASTM D 6866 (calculated) is **>97%**.

MAIN CHARACTERISTICS

PROPERTIES	DRY / COND	UNIT	TEST STANDARD
RHEOLOGICAL PROPERTIES			
Melt Volume-Flow Rate	20 / *	cm ³ /10min	ISO 1133
Temperature	235 / *	°C	-
Load	5 / *	kg	-
MECHANICAL PROPERTIES			
Tensile Modulus	- / 1850	MPa	ISO 527-1/-2
Stress at Break	- / 31	MPa	ISO 527-1/-2
Strain at Break	- / 40	%	ISO 527-1/-2
Shore D Hardness, 15s	71 / *	-	ISO 7619-1
Charpy Impact Strength, +23°C	- / 96	kJ/m ²	ISO 179/1eU
Charpy Impact Strength, -30°C	- / 96	kJ/m ²	ISO 179/1eU
Charpy Notched Impact Strength, +23°C	- / 6	kJ/m ²	ISO 179/1eA
Charpy Notched Impact Strength, -30°C	- / 5	kJ/m ²	ISO 179/1eA
THERMAL PROPERTIES			
Melting Temperature, 10°C/min	189 / *	°C	ISO 11357-1/-3
Temp. of Deflection Under Load, 1.80 MPa	60 / *	°C	ISO 75-1/-2
Temp. of Deflection Under Load, 0.45 MPa	165 / *	°C	ISO 75-1/-2
Vicat Softening Temperature, 50°C/h 50N	165 / *	°C	ISO 306
Coeff. of Linear Thermal Expansion, parallel	70 / *	E-6/K	ISO 11359-1/-2
Burning Behav. at 1.5 mm Nominal Thickness	HB / *	class	IEC 60695-11-10
Thickness Tested	1.6 / *	mm	-
Burning Behav. at Thickness h	HB / *	class	IEC 60695-11-10
Thickness Tested	3.2 / *	mm	-
ELECTRICAL PROPERTIES			
Volume Resistivity	- / 1E12	Ohm*m	IEC 60093
Surface Resistivity	* / 1E14	Ohm	IEC 60093
Dielectric (Electric) Strength	- / 40	kV/mm	IEC 60243-1
Comparative Tracking Index	* / 600	-	IEC 60112
OTHER PROPERTIES			

Arkema France - A French "société anonyme", registered in the Nanterre (France) Trade and Companies Register under the number 319 632 790 SBC/11-2018

Please consult Arkema's disclaimer regarding the use of Arkema's products on <https://www.arkema.com/en/products/product-safety/disclaimer/index.html>

RILSAN®
BY ARKEMA

RILSAN® BUM 30 0

Water Absorption	1.3 / *	%	Sim. to ISO 62
Density	1230 / 1230	kg/m ³	ISO 1183
%Bio-Based	97	-	ASTM D6866

MAIN APPLICATIONS:

- Drinking water applications

PACKAGING:


This grade is delivered dried in sealed packaging (25 kg bags) ready to be processed.

SHELF LIFE:


Two years from the delivery. For any use above this limit, please refer to our technical services.

DIAGRAMS

VISCOSITY-SHEAR RATE

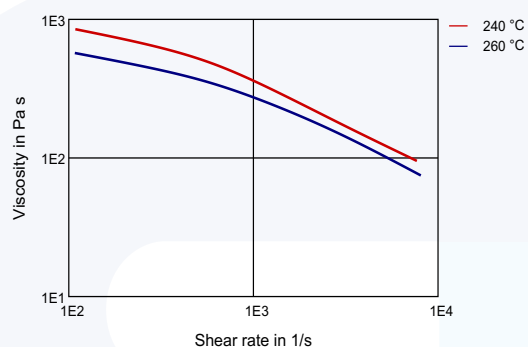

SHEARSTRESS-SHEAR RATE

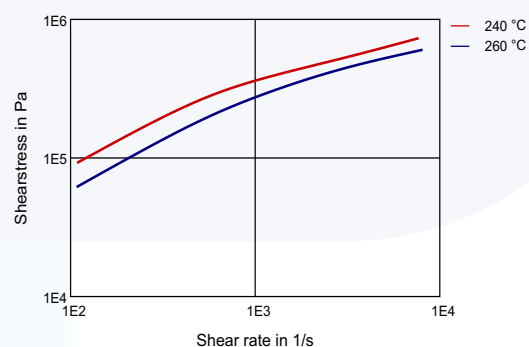


Arkema France - A French "société anonyme", registered in the Nanterre (France) Trade and Companies Register under the number 319 632 790
SDC/11-2018

Please consult Arkema's disclaimer regarding the use of Arkema's products on <https://www.arkema.com/en/products/product-safety/disclaimer/index.html>

RILSAN®
BY ARKEMA

RILSAN® BUM 30 0

DYNAMIC SHEAR MODULUS-TEMPERATURE

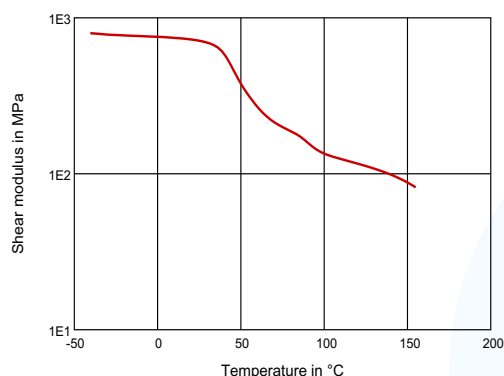

Processing conditions:

- Typical melt temperature (Min / Recommended / Max) : 250°C / 270°C / 290°C.
- Mold temperature : 40 - 90°C

- Drying time and temperature (only necessary for bags opened for more than two hours) : 4-6 hours at 80-90°C.

PROCESSING

Injection Molding

DELIVERY FORM

Pellets

ADDITIVES

Release agent

SPECIAL CHARACTERISTICS

Bio-Based

REGIONAL AVAILABILITY

North America, Europe, Asia Pacific, South and Central America, Near East/Africa

Arkema France - A French "société anonyme" registered in the Nanterre (France) Trade and Companies Register under the number 319 632 790 S00711-2018

Please consult Arkema's disclaimer regarding the use of Arkema's products on <https://www.arkema.com/en/products/product-safety/disclaimer/index.html>

Rilsan® is a registered trademark of Arkema
© 2022 Arkema Inc. All rights reserved.

rilsan.com

Arkema Inc. – Technical Polymers

900 First Avenue
King of Prussia, PA 19406
Tel.: +1 610 205 7000
Fax: +1 610 205 7497
arkema-america.com

RILSAN®
BY ARKEMA

Headquarters: Arkema France

420, rue d'Estienne d'Orves
92705 Colombes Cedex – France
Tel.: +33 1 49 00 80 80
Fax: +33 1 49 00 83 96
arkema.com