

LOTTE CHEMICAL

AG-3020

PC/ABS alloy resin

General information

Description

PC/ABS with balanced flowability, impact properties and hydrolytic stability

Applications

Wide variety of applications with electronic housings

Typical properties¹

	Test method	Typical value	Unit
Physical			
Melt Flow Index , 250°C, 2.16 kg	ASTM D1238	-	g/10 min
Specific Gravity	ASTM D792	1.1	
Mold Shrinkage	ASTM D955	0.5~0.7	%
Mechanical			
Tensile Strength , yield, 50 mm/min	ASTM D638	580	kg _f /cm ²
Tensile Elongation , break, 50 mm/min	ASTM D638	> 80	%
Flexural Strength , yield, 10 mm/min	ASTM D790	880	kg _f /cm ²
Flexural Modulus , 10 mm/min	ASTM D790	24,000	kg _f /cm ²
IZOD Impact Strength , notched, 23°C, 1/8"	ASTM D256	55	kg _f ·cm/cm
notched, 23°C, 1/4"	ASTM D256	-	kg _f ·cm/cm
notched, -30°C, 1/8"	ASTM D256	10	kg _f ·cm/cm
Thermal			
Heat Distortion Temp. 4.6 kg _f /cm ²	ASTM D648	-	°C
18.6 kg _f /cm ²	ASTM D648	95	°C
Vicat Softening Temp. Rate B/50	ASTM D1525	-	°C

Notes

ISO 9001, 14001, TS 16949

¹ Typical properties : these are not to be construed as specifications.


www.lottechem.com

LOTTE CHEMICAL

AG-3020
PC/ABS alloy resin

Processing guides¹

	Typical value	Unit
Drying condition		
Drying temperature	80 ~ 90	°C
Drying time	4	hr
Maximum moisture content	0.02	%
Injection molding		
Melt temperature	240 ~ 260	°C
Nozzle temperature	240 ~ 260	°C
Barrel	Rear zone	240 ~ 260 °C
	Middle zone	240 ~ 260 °C
	Front zone	230 ~ 250 °C
Hopper temperature	60 ~ 80	°C
Mold temperature	60 ~ 80	°C

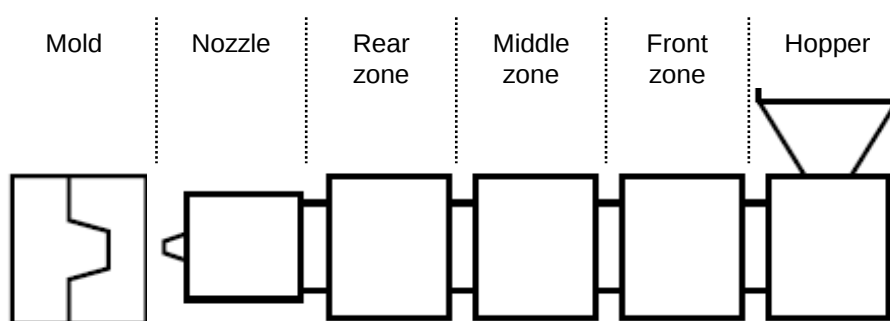

Recycling

Sprues and runners can be reground with virgin resin within the ratio of 20%. Care must be taken to ensure that the regrind is free from impurities and regrind should not be used in applications where impact performance and/or agency compliance are required.

Notes

ISO 9001, 14001, TS 16949

¹ Processing guides : Typical processing parameters are noted. Actual processing conditions will depend on machine size, mold design, material residence time, shot size, etc.

www.lottechem.com