

Product information

VESTOLIT® B 6021 Ultra

Polyvinyl chloride for paste processing


VESTOLIT B 6021 Ultra is a paste-forming micro-S-PVC homopolymer which is suitable for producing low viscosity pastes with almost Newtonian flow and good storage stability.

B 6021 Ultra has both good fusion and foaming properties at low temperatures.

Application	Solid	Foam
Coated fabrics	○	○
Floor coverings	●	●
Wallpapers, wall coverings	●	●
Canvas coating		
Unsupported layers, films		
Dipping, casting	○	○
Spray coating	○	○

● recommended ○ feasible

B 6021 Ultra/DINP-Ratio

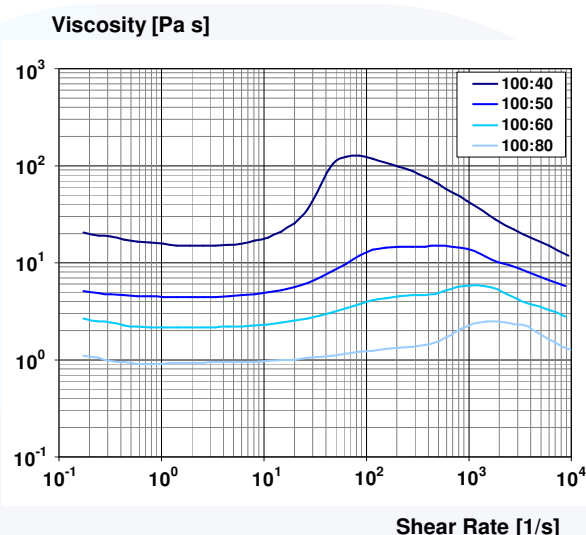

Viscosity as a function of the shear rate for various PVC/plasticiser ratios, measured in a rotary viscometer at 25 °C after 24 h ageing.

Property	Method	Unit	Value ¹⁾
K value	DIN EN ISO 1628-2	-	60
Viscosity number	DIN EN ISO 1628-2	cm ³ /g	89
Apparent bulk density	DIN EN ISO 60	g/cm ³	0.3
Sieve analysis - retained on 0.063 mm sieve	DIN EN ISO 1624	%	< 1
Water content according to K. Fischer	DIN 53 715	%	≤ 0.3
pH value of the aqueous extract	DIN EN ISO 1264	-	7
Paste viscosity 1.5 /s		Pa s	2.0
Paste viscosity 45 /s		Pa s	2.5

1) The figures quoted above are typical values, and do not form part of the specification.

100 parts PVC, 60 parts DINP - measured in a rotary viscometer with a defined shear gap at 25 °C after ageing for 2 hours.

Due to the low K-value of 60, VESTOLIT B 6021 Ultra provides faster fusion even at low temperatures and produces a fine cell structure when using particular kicker / blowing agent combinations, and/or fast kickers. The product is therefore particularly well suited for back coat foaming of CV floor coverings.

In both compact and foamed wallcoverings, high embossing speeds can be realized with B 6021 Ultra due to the low fusion temperature. B 6021 Ultra can be mechanically foamed and also has excellent drum release properties.

Version 09.2013

VESTOLIT GmbH • D 45753 Marl • P.O. Box 10 23 60
 Phone: + 49 23 65 / 49 - 05 • Fax: + 49 23 65 / 49 - 40 00 • E-Mail: info@vestolit.de

This information is based on our present knowledge and experience. However, it implies no liability or other legal responsibility on our part, including with regard to existing third party patent rights in particular, no guarantee of properties in the legal sense is implied. We reserve the right to make any change according to technical progress of further developments. The customer is not released from the obligation to conduct careful inspection and testing of incoming goods. Reference to trade names used by other companies neither recommendation, nor is intended to suggest that similar products could be used. All our business transactions shall exclusively be governed by our General sales Conditions. ® = registered trademark