

Product information

VESTOLIT® E 8001

Polyvinyl chloride for paste processing


VESTOLIT E 8001 is a paste-forming alkali prestabilized homopolymer, which is suitable for producing medium viscosity pastes with pseudoplastic flow and good storage stability.

The properties of VESTOLIT E 8001 make it particularly suitable for compact coating.

Application	Solid	Foam
Coated fabrics	●	
Floor coverings	●	
Wallpapers, wall coverings	●	
Canvas coating		
Unsupported layers, films		
Dipping, casting	○	
Spray coating	○	

● recommended ○ feasible

E 8001/DINP-Ratio

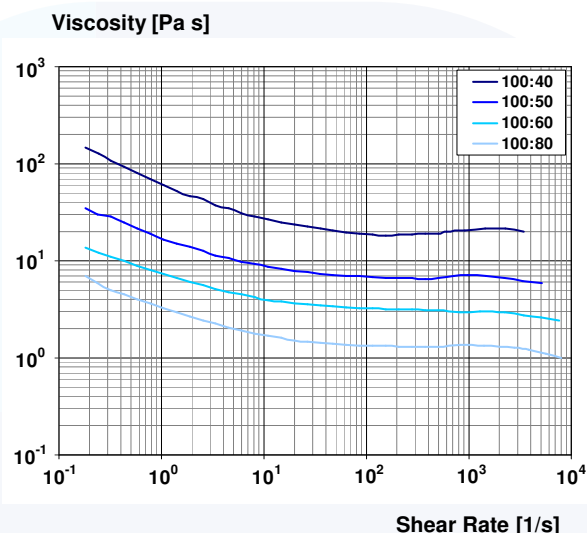

Property	Method	Unit	Value ¹⁾
K value	DIN EN ISO 1628-2	-	80
Viscosity number	DIN EN ISO 1628-2	cm ³ /g	170
Apparent bulk density	DIN EN ISO 60	g/cm ³	0.4
Sieve analysis - retained on 0.040 mm sieve	DIN EN ISO 1624	%	≤ 1
Water content according to K. Fischer	DIN 53 715	%	≤ 0.4
pH value of the aqueous extract	DIN EN ISO 1264	-	10
Paste viscosity 1.5 /s		Pa s	6
Paste viscosity 45 /s		Pa s	3

1) The figures quoted above are typical values, and do not form part of the specification.

100 parts PVC, 60 parts DINP - measured in a rotary viscometer with a defined shear gap at 25 °C after ageing for 2 hours.

VESTOLIT E 8001 is used mainly in compact coatings for the production of imitation leather, wall coverings, floorings and conveyor belts. The particle size distribution of the product has only a

very low percentage of coarse particles and is used above mainly in the manufacture of compact coated wallpaper by either reverse roll coating or rotational screen printing.

Version 09.2013

VESTOLIT GmbH • D 45753 Marl • P.O. Box 10 23 60
 Phone: + 49 23 65 / 49 - 05 • Fax: + 49 23 65 / 49 - 40 00 • E-Mail: info@vestolit.de

This information is based on our present knowledge and experience. However, it implies no liability or other legal responsibility on our part, including with regard to existing third part patent rights in particular, no guarantee of properties in the legal sense is implied. We reserve the right to make any change according to technical progress of further developments. The customer is not released from the obligation to conduct careful inspection and testing of incoming goods. Reference to trade names used by other trade names by other companies neither recommendation, nor is intended to suggest that similar products could be used. All our business transactions shall exclusively be governed by our General sales Conditions. ® = registered trademark